

# PT9101 (Extended Range)

## Extended Ranges • Voltage Divider

Absolute Linear Position to 1700 inches (4300 cm)

Stroke Range Options: 0-600 to 0-1700 inches

VLS Option To Prevent Free-Release Damage

IP68 • NEMA 6 Protection



### GENERAL



Full Stroke Range Options (on this datasheet)	0-600 to 0-1700 inches
Output Signal	voltage divider (potentiometer)
Accuracy	± 0.10% full stroke
Repeatability	± 0.02% full stroke
Resolution	essentially infinite
Measuring Cable Options	stainless steel or thermoplastic
Enclosure Material	powder-painted aluminum or 303 stainless steel
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	≥ 250,000
Maximum Retraction Acceleration	see ordering information
Maximum Velocity	see ordering information
Weight, Aluminum (Stainless Steel) Enclosure	14 lbs. (28 lbs.) max.

### ELECTRICAL

Input Resistance Options	500, 1K, 5K, 10K Ω, bridge
Power Rating, Watts	2.0 at 70°F derated to 0 at 250° F
Recommended Maximum Input Voltage	30V (AC/DC)
Output Signal Change Over Full Stroke Range	94% ±4% of input voltage

### ENVIRONMENTAL


Enclosure	NEMA 4/4X/6, IP 67/68
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum

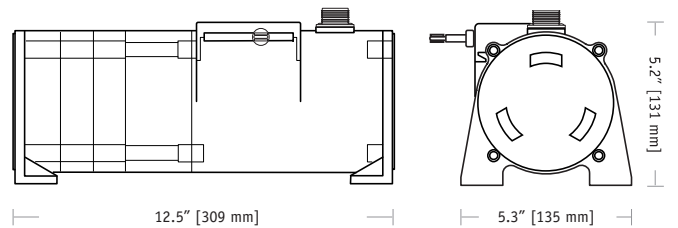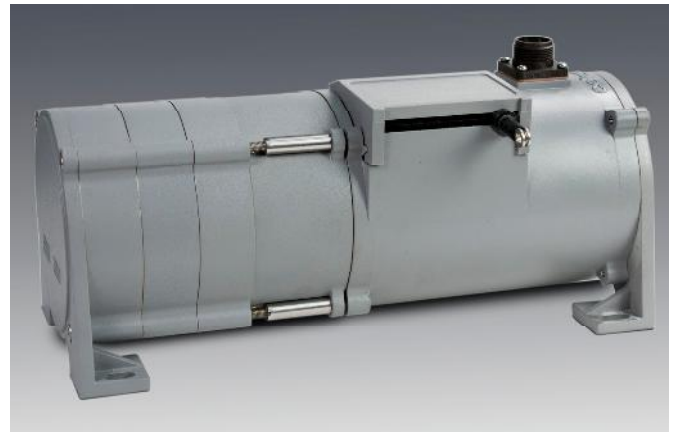

The PT9101 is a work-horse for demanding long-range applications requiring a linear position measurements in ranges up to 1700 inches. Available with either a 500, 1K, 5K, or 10K ohm potentiometer, the PT9101 operates with any basic panel meter or programmable controller.



As a member of Celesco's innovative family of NEMA 4 rated cable-extension transducers, the PT9101 offers numerous benefits. It installs in minutes, works without perfect parallel alignment, and when it's stainless-steel cable is retracted, it measures only 6".

### Output Signal:

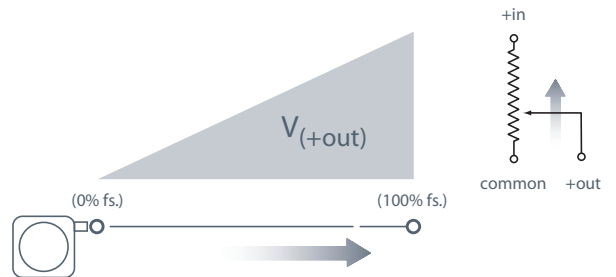



-- bridge circuit option available, see ordering information

Outline Drawing

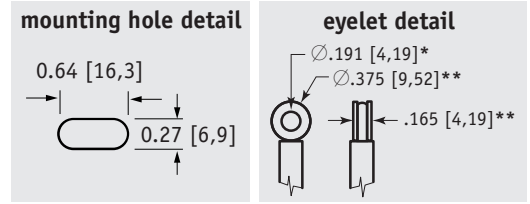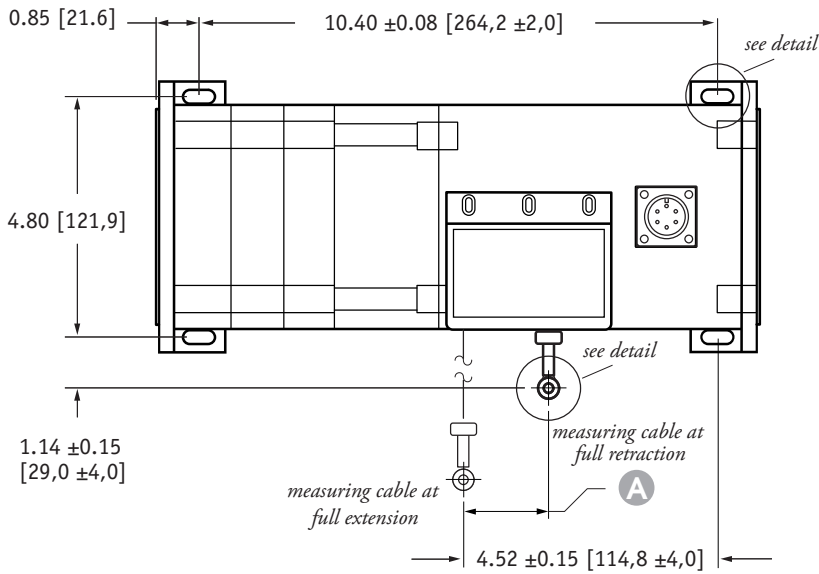

**A DIMENSION**

RANGE	inches [mm]
600	1.76 [44,7]
800	1.58 [40,1]
1000	1.98 [50,2]
1200	1.98 [50,2]
1500	1.86 [47,2]
1700	2.11 [53,6]

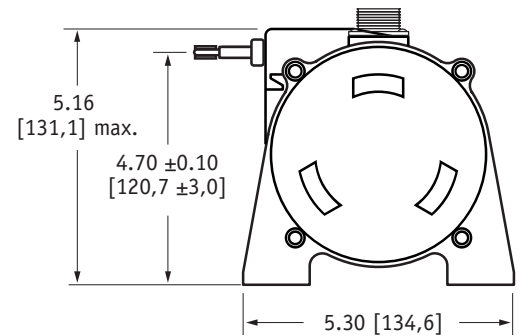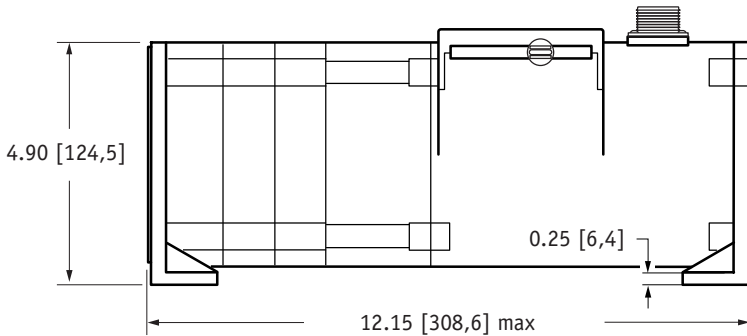

DIMENSIONS ARE IN INCHES [MM]  
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 -.001 [+.13 -.03]  
\*\* tolerance = +.005 -.005 [+.13 -.13]

## VLS Option - Free Release Protection

The patented Celesco Velocity Limiting System (VLS) is an option for PT9000 Series cable extension transducers that limits cable retraction to a safe 40 to 55 inches per second for the single spring option and 40 to 80 inches per second for the higher tension dual spring option.

The VLS option prevents the measuring cable from ever reaching a damaging velocity during an accidental free release. This option is ideal for mobile applications that require frequent cable disconnection and reconnection. It prevents expensive unscheduled downtime due to accidental cable mishandling or attachment failure.

How To Configure Model Number for VLS Option:



creating VLS model number (example)...

1. select PT9101 model **PT9101-1200-111-1110**
2. remove "PT" from the model number ~~PT~~ **9101-1200-111-1110**
3. add "VLS" **VLS + 9101-1200-111-1110**
4. completed model number ! **VLS9101-1200-111-1110**

Ordering Information:

Model Number:

**PT9101-** order code: **R** - **A** - **B** - **C** - **D** **1** - **E** - **F** **0** **G**

Sample Model Number:

**PT9101 - 1200 - 111 - 1110**

- R** range: 1200 inches
- A** enclosure: aluminum
- B** measuring cable: nylon-coated stainless
- C** cable exit: front
- D** output signal: 500 ohm potentiometer
- F** electrical connection: 6-pin plastic connector

Full Stroke Range:

<b>R</b> order code:	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
full stroke range, min:	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
cable tension (±35%):	27 oz.	24 oz.	20 oz.	19 oz.	18 oz.	17 oz.

Enclosure Material:

<b>A</b> order code:	<b>1</b>	<b>3</b>
enclosure material:	powder-painted aluminum	303 stainless steel
max. acceleration:	1g	.33g
max. velocity:	60 inches/sec.	20 inches/sec.





Measuring Cable:

<b>B</b> order code:	<b>1</b>	<b>2</b>
	nylon-coated stainless steel*	un-coated stainless steel*

\*cable diameter:


stroke range:	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
nylon-coated cable:	.034 in.	.019 in.	.019 in.	.019 in.	.014 in.	.014 in.
un-coated cable:	.031 in.	.018 in.	.018 in.	.018 in.	.015 in.	.015 in.

Cable Exit:

<b>G</b> order code:	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
	front	top	back	down
				





Output Signals:




<b>D</b> order code:	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>
	500 ohm*	1000 ohm*	5000 ohm*	10,000 ohm*	fixed bridge (2 mV/V)	adjustable bridge (0...30 mV/V)
				*tolerance = ±10%		

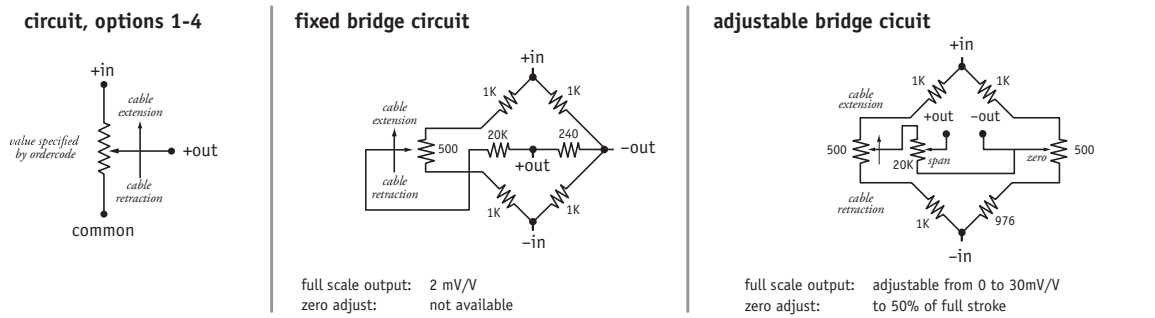

Ordering Information (cont.):

**Electrical Connection:**

order code:	1	2	3	4
	6-pin plastic connector w/mating plug <b>IP 67, NEMA 4X**, 6</b>	10-ft. [3 M] waterproof cable <b>IP 67, NEMA 4X**, 6</b>	6-pin metal connector w/mating plug <b>IP 65, NEMA 4</b>	25-ft. [7.5 M] instrumentation cable <b>IP 67, NEMA 6</b>
				
	1/2 - 5/16" [14 - 8 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW	3/8-in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	25 ft. x 0.2-in. dia. [7,5 M x 5 mm dia.] 24 AWG, shielded

order code:	5	6	7
	100-ft. [30 M] waterproof cable <b>IP 67, NEMA 4X**, 6</b>	10-ft. [3 M] <b>pressure tested*</b> waterproof cable <b>IP 68, NEMA 4X**, 6P</b>	100-ft. [30 M] <b>pressure tested*</b> waterproof cable <b>IP 68, NEMA 4X**, 6P</b>
			
	100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW	10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW	100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW

**6-pin Mating Plug**

pin	standard	bridge
A	+ in	+ in
B	common	- in
C	+ out	- out
D	-	+ out



**Waterproof Cable**

color code	standard	bridge
WHITE	+ in	n/a
BLACK	common	n/a
GREEN	+ out	n/a

**Instrumentation Cable**

color code	standard	bridge
RED	+ in	+ in
BLACK	common	- in
GREEN	+ out	+ out
WHITE	-	- out

Notes: \*-Test pressure: 100 feet [30 meters] H<sub>2</sub>O (40 PSID); Test Medium: Air; Duration: 2 hours. \*\*-NEMA 4X applies to stainless steel enclosure only.

version: 8.0 last updated: April 10, 2013

# PT9420 (Extended Range)

Extended Ranges • 4...20mA, 0...20mA

Absolute Linear Position to 1700 inches (4300 cm)

Stroke Range Options: 0-600 to 0-1700 inches

VLS Option To Prevent Free-Release Damage

IP68 • NEMA 6 Protection • Hazardous Area Certification



## GENERAL

Full Stroke Range Options (on this datasheet)	0-600 to 0-1700 inches
Output Signal Options	4...20 mA (2-wire) and 0...20 mA (3-wire)
Accuracy	± 0.12% full stroke
Repeatability	± 0.05% full stroke
Resolution	essentially infinite
Measuring Cable	nylon-coated stainless steel
Enclosure Material	powder-painted aluminum or 303 stainless steel
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	≥ 250,000, min.
Maximum Retraction Acceleration/ Velocity	see ordering information
Weight, Aluminum (Stainless Steel) Enclosure	14 lbs. (28 lbs.) max.

## ELECTRICAL



Input Voltage	see ordering information
Input Current	20 mA max.
Maximum Loop Resistance (Load)	(loop supply voltage – 8)/0.020
Circuit Protection	38 mA max.
Impedance	100M ohms @ 100 VDC, min.
Output Signal, Zero Adjust	up to 50% of full stroke range
Output Signal, Span Adjust	to 50% of factory set span

## ENVIRONMENTAL

Enclosure	NEMA 4/4X/6, IP 67/68
Hazardous Area Certification	see ordering information
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum
Thermal Effects, Zero	0.01% f.s./°F, max.
Thermal Effects, Span	0.01%/°F, max.

## EMC COMPLIANCE PER DIRECTIVE 89/336/EEC


Emission / Immunity	EN50081-2 / EN50082-2
---------------------	-----------------------

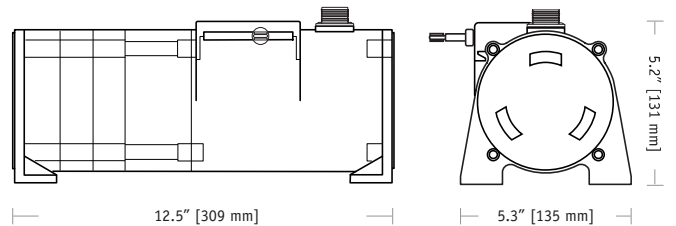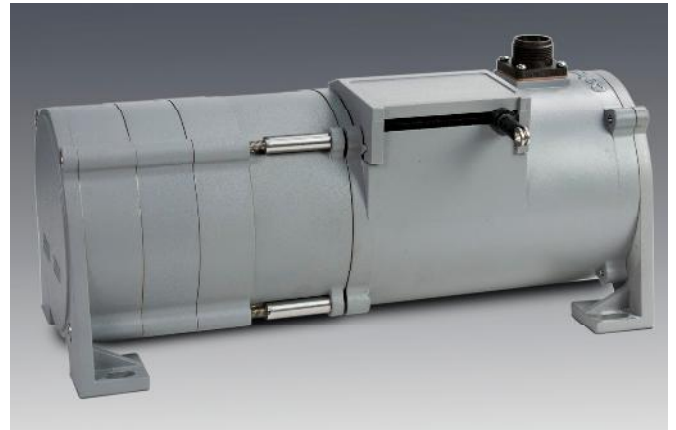

The PT9420 is a great value for demanding long-range applications requiring a 4 - 20 mA linear position feedback signal. Sealed to meet NEMA 4 standards, this Cable-Extension Transducer will perform even under the harshest of environmental conditions.


As a member of Celesco's innovative family of NEMA-4 rated cable-extension transducers, the PT9420 offers numerous benefits. It installs in minutes, functions properly without perfectly parallel alignment, and when its cable is retracted, it measures only 6".

### Output Signal:

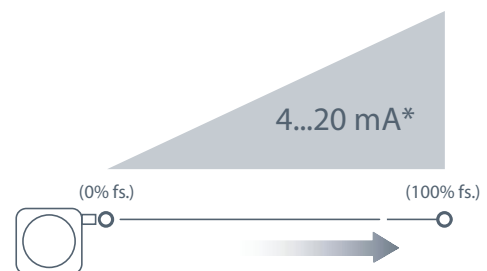


\*Optional 3-wire, 0...20mA output signal available.


**Outline Drawing**

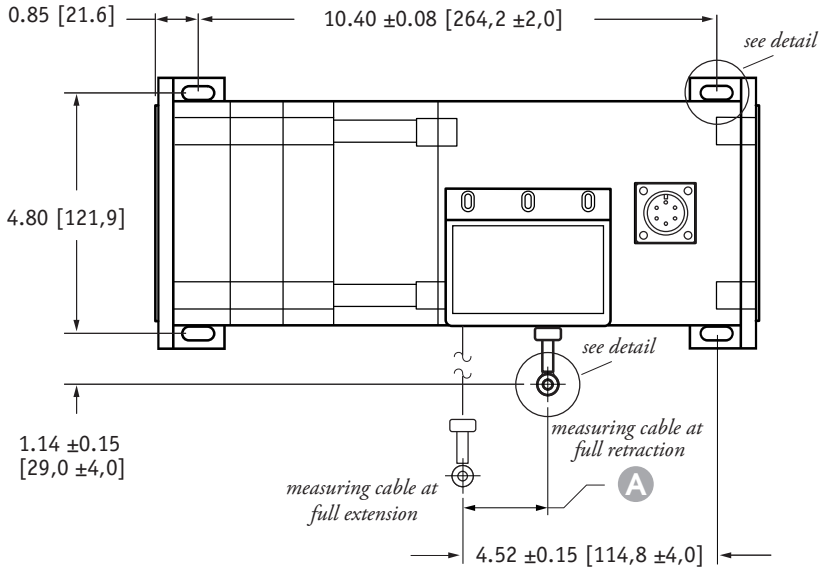

**mounting hole detail**





**eyelet detail**



**A DIMENSION**

RANGE	inches [mm]
600	1.76 [44,7]
800	1.58 [40,1]
1000	1.98 [50,2]
1200	1.98 [50,2]
1500	1.86 [47,2]
1700	2.11 [53,6]

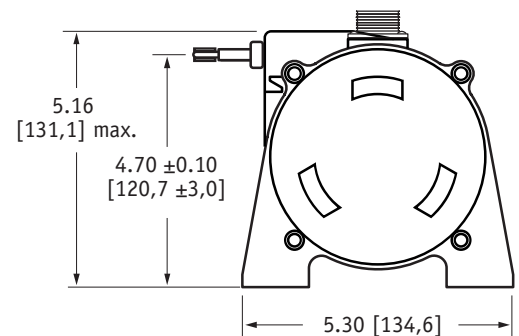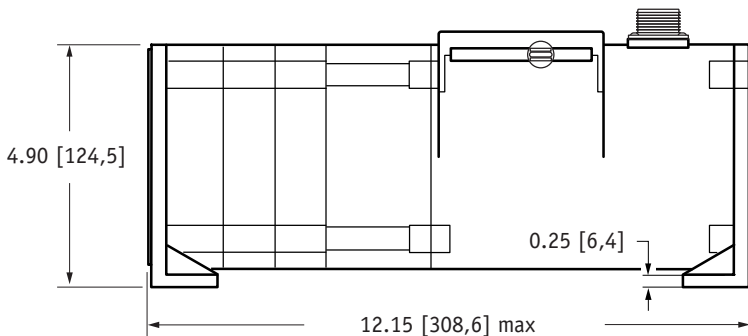

DIMENSIONS ARE IN INCHES [MM]  
 tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 -.001 [+,.13 -.03]  
 \*\* tolerance = +.005 -.005 [+,.13 -.13]

## VLS Option - Free Release Protection

The patented Celesco Velocity Limiting System (VLS) is an option for PT9000 Series cable extension transducers that limits cable retraction to a safe 40 to 55 inches per second for the single spring option and 40 to 80 inches per second for the higher tension dual spring option.

The VLS option prevents the measuring cable from ever reaching a damaging velocity during an accidental free release. This option is ideal for mobile applications that require frequent cable disconnection and reconnection. It prevents expensive unscheduled downtime due to accidental cable mishandling or attachment failure.

How To Configure Model Number for VLS Option:

**VLS 9420** - \_\_\_\_\_ R - A B C - D E F G

creating VLS model number (example)...

- select PT9420 model **PT9420-1200-111-1110**
- remove "PT" from the model number ~~PT~~ **9420-1200-111-1110**
- add "VLS" **VLS + 9420-1200-111-1110**
- completed model number ! **VLS9420-1200-111-1110**

## Ordering Information:

### Model Number:

**PT9420-** \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - **1** - \_\_\_\_\_ - \_\_\_\_\_ - **0**  
order code:      **R**      **A**      **B**      **C**      **D**      **E**      **F**      **G**

Sample Model Number:

**PT9420 - 1200 - 111 - 1110**

<b>R</b> range:	1200 inches
<b>A</b> enclosure/cable tension:	aluminum
<b>B</b> measuring cable:	nylon-coated stainless front
<b>C</b> cable exit:	front
<b>E</b> output signal:	4...20 mA, 2-wire
<b>F</b> electrical connection:	6-pin plastic connector

### Full Stroke Range:

<b>R</b> order code:	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
full stroke range, min:	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
cable tension (±35%):	27 oz.	24 oz.	20 oz.	19 oz.	18 oz.	17 oz.

### Enclosure Material:

<b>A</b> order code:	<b>1</b>	<b>3</b>
enclosure material:	powder-painted aluminum	303 stainless steel
max. acceleration:	1g	.33g
max. velocity:	60 inches/sec.	20 inches/sec.

### Measuring Cable:

<b>B</b> order code:	<b>1</b>	<b>2</b>
	nylon-coated stainless steel*	un-coated stainless steel*

*cable diameter:	stroke range:	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
	nylon-coated cable:	.034 in.	.019 in.	.019 in.	.019 in.	.014 in.	.014 in.
	un-coated cable:	.031 in.	.018 in.	.018 in.	.018 in.	.015 in.	.015 in.

### Cable Exit:

<b>G</b> order code:	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
	front	top	back	down

### Output Signals:

<b>F</b> order code:	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5*</b>	<b>6*</b>
output signal options:	4...20 mA 	20...4 mA 	0...20 mA 	20...0 mA 	4...20 mA 	20...4 mA 
sensitivity:	16 mA/full stroke ±0.25%		20 mA/full stroke ±0.25%		16 mA/full stroke ±0.25%	
wiring configuration:	2 - wire		3 - wire		2 - wire	
input voltage:	8 - 34 vdc		14 - 29 vdc		14 - 32 vdc	
hazardous area certification:			not certified		CSA • Cenelec	

Output Signal Example:

ordercode = **1** = 4...20 mA →

4 mA =

20 mA =









Hazardous Area Certifications:

CSA Standard 22.2 Class 1 Groups A, B, C and D	Cenelec LCIE EEx ia IIc T4

10-11 Colorado Court, Hallam  
 Victoria 3803, Australia  
 Telephone: 61 3 9708 6885  
 Facsimile: 61 3 9708 6770  
 Email: idm@idminstruments.com.au  
 Web: www.idminstruments.com.au


Ordering Information (cont.):

**Electrical Connection:**


1		2		3		4																																											
<b>6-pin plastic connector w/mating plug</b> <b>IP 67, NEMA 4X**, 6</b>  1/2 - 5/16" [14 - 8 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S		<b>10-ft. [3 M] waterproof cable</b> <b>IP 67, NEMA 4X**, 6</b>  10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW		<b>6-pin metal connector w/mating plug</b> <b>IP 65, NEMA 4</b>  3/8-in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S		<b>25-ft. [7.5 M] instrumentation cable</b> <b>IP 67, NEMA 6</b>  25 ft. x 0.2-in. dia. [7.5 M x 5 mm dia.] 24 AWG, shielded																																											
<b>100-ft. [30 M] waterproof cable</b> <b>IP 67, NEMA 4X**, 6</b>  100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW		<b>10-ft. [3 M] pressure tested* waterproof cable</b> <b>IP 68, NEMA 4X**, 6P</b>  10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW		<b>100-ft. [30 M] pressure tested* waterproof cable</b> <b>IP 68, NEMA 4X**, 6P</b>  100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW																																													
<b>6-pin Mating Plug</b> <table border="1"> <thead> <tr> <th>pin</th> <th>2-wire</th> <th>3-wire</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>8...34 vdc***</td> <td>14...29 vdc common</td> </tr> <tr> <td>B</td> <td>4...20 mA out</td> <td></td> </tr> <tr> <td>C</td> <td>-</td> <td>0...20 mA out</td> </tr> <tr> <td>D</td> <td>case ground</td> <td>-</td> </tr> </tbody> </table>		pin	2-wire	3-wire	A	8...34 vdc***	14...29 vdc common	B	4...20 mA out		C	-	0...20 mA out	D	case ground	-	 <i>contact view</i>		<b>Waterproof Cable</b> <table border="1"> <thead> <tr> <th>color code</th> <th>2-wire</th> <th>3-wire</th> </tr> </thead> <tbody> <tr> <td>WHITE</td> <td>8...34 vdc***</td> <td>14...29 vdc common</td> </tr> <tr> <td>BLACK</td> <td>4...20 mA out</td> <td></td> </tr> <tr> <td>GREEN</td> <td>case ground</td> <td>0...20 mA out</td> </tr> </tbody> </table>		color code	2-wire	3-wire	WHITE	8...34 vdc***	14...29 vdc common	BLACK	4...20 mA out		GREEN	case ground	0...20 mA out	<b>Instrumentation Cable</b> <table border="1"> <thead> <tr> <th>color code</th> <th>2-wire</th> <th>3-wire</th> </tr> </thead> <tbody> <tr> <td>RED</td> <td>8...34 vdc***</td> <td>14...29 vdc common</td> </tr> <tr> <td>BLACK</td> <td>4...20 mA out</td> <td></td> </tr> <tr> <td>WHITE</td> <td>n/a</td> <td>n/a</td> </tr> <tr> <td>GREEN</td> <td>case ground</td> <td>0...20 mA out</td> </tr> </tbody> </table>		color code	2-wire	3-wire	RED	8...34 vdc***	14...29 vdc common	BLACK	4...20 mA out		WHITE	n/a	n/a	GREEN	case ground	0...20 mA out
pin	2-wire	3-wire																																															
A	8...34 vdc***	14...29 vdc common																																															
B	4...20 mA out																																																
C	-	0...20 mA out																																															
D	case ground	-																																															
color code	2-wire	3-wire																																															
WHITE	8...34 vdc***	14...29 vdc common																																															
BLACK	4...20 mA out																																																
GREEN	case ground	0...20 mA out																																															
color code	2-wire	3-wire																																															
RED	8...34 vdc***	14...29 vdc common																																															
BLACK	4...20 mA out																																																
WHITE	n/a	n/a																																															
GREEN	case ground	0...20 mA out																																															

Notes: { \* -Test pressure: 100 feet [30 meters] H<sub>2</sub>O (40 PSID); Test Medium: Air; Duration: 2 hours.  
 \*\* -NEMA 4X applies to stainless steel enclosure only.  
 \*\*\* -14-32 VDC for hazardous area option.

Output Signal Settings:

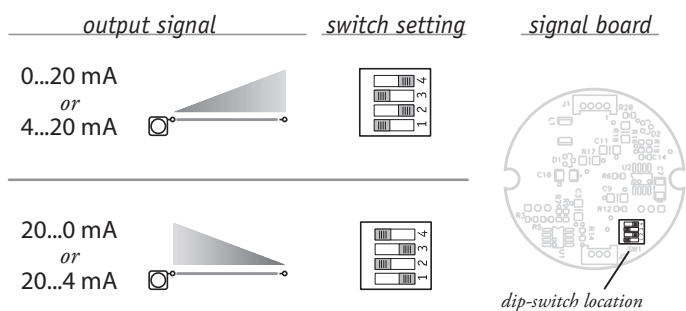

To gain access to the signal board, remove four Allen-Head Screws and remove end cover bracket.

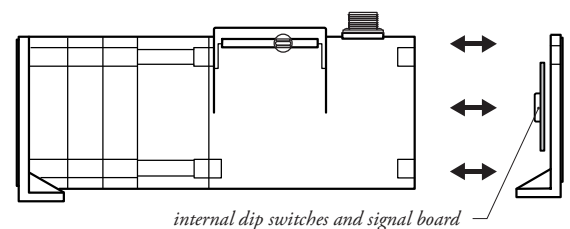

**Caution! Do Not Remove Spring-Side End Cover**  
 Removing spring-side end cover could cause spring to become unseated and permanently damaged.

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.



# PT9510 (Extended Range)

Extended Ranges • 0...5 Vdc, 0...10 Vdc

Absolute Linear Position to 1700 inches (4300 cm)

Stroke Range Options: 0-600 to 0-1700 inches

VLS Option To Prevent Free-Release Damage

IP68 • NEMA 6 Protection • Hazardous Area Certification



## GENERAL

Full Stroke Range Options (on this datasheet)	0-600 to 0-1700 inches
Output Signal Options	0...10, 0...5, -5...+5, -10...+10 VDC
Accuracy	± 0.12% full stroke
Repeatability	± 0.05% full stroke
Resolution	essentially infinite
Measuring Cable Options	stainless steel or thermoplastic
Enclosure Material	powder-painted aluminum or 303 stainless steel
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	≥ 250,000
Maximum Retraction Acceleration	see ordering information
Maximum Velocity	see ordering information
Weight, Aluminum (Stainless Steel) Enclosure	14 lbs. (28 lbs.) max.

## ELECTRICAL



Input Voltage	14.5-40VDC (10.5-40VDC for 0-5 volt output)
Input Current	10 mA maximum
Output Impedance	1000 ohms
Maximum Output Load	5000 ohms
Output Signal, Zero Adjust	up to 50% of full stroke range
Output Signal, Span Adjust	to 50% of factory set span

## ENVIRONMENTAL

Enclosure	NEMA 4/4X/6, IP 67/68
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum

## EMC COMPLIANCE PER DIRECTIVE 89/336/EEC


Emission / Immunity	EN50081-2 / EN50082-2
---------------------	-----------------------

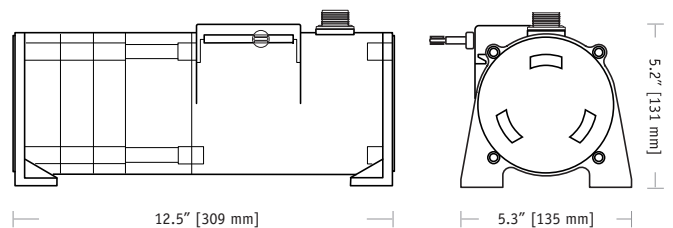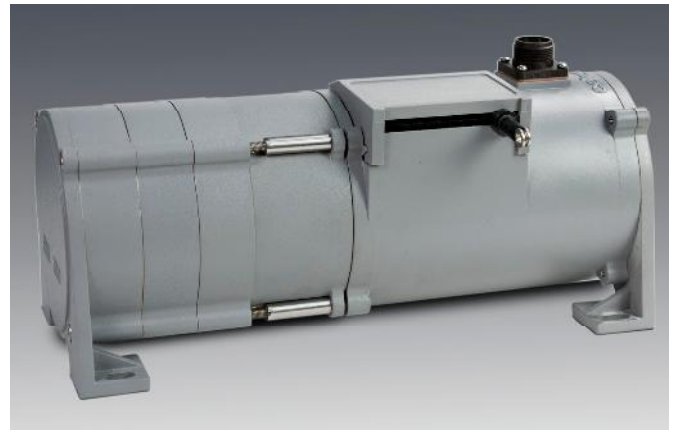

The PT9510 can operate from an unregulated 14.5 to 40 VDC power supply while providing a regulated output signal over its full extended range of up to 1700". It provides a 0 - 10 VDC position feedback signal proportional to the linear movement of its stainless steel measuring cable.



As a member of Celesco's innovative family of NEMA-4 rated cable-extension transducers, the PT9510 offers numerous benefits. It installs in minutes, functions properly without perfectly parallel alignment, and when its cable is retracted, it measures only 6".

### Output Signal:

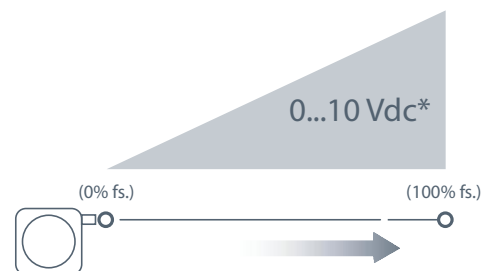



\*Additional Output Options: 0...5, -5...+5, -10...+10 Vdc

Outline Drawing

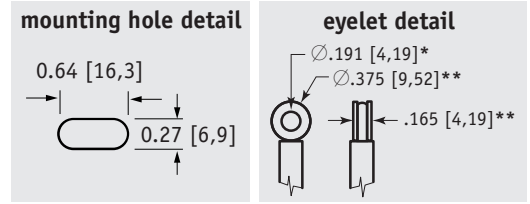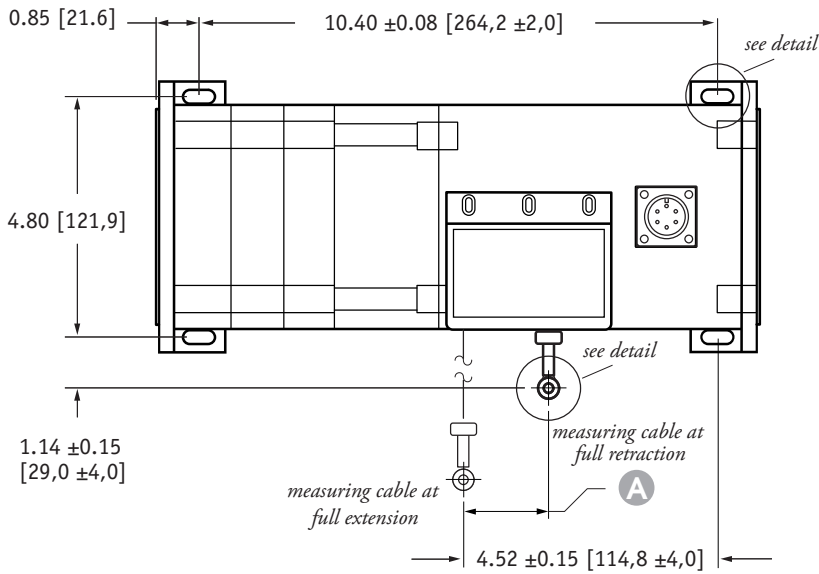

**A DIMENSION**

RANGE	inches [mm]
600	1.76 [44,7]
800	1.58 [40,1]
1000	1.98 [50,2]
1200	1.98 [50,2]
1500	1.86 [47,2]
1700	2.11 [53,6]

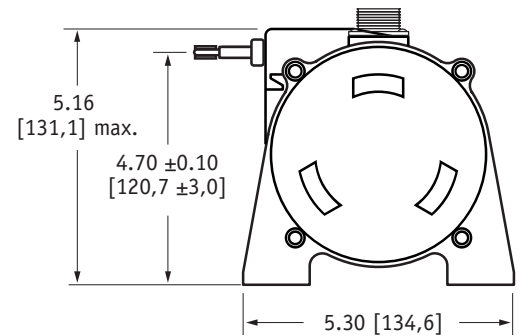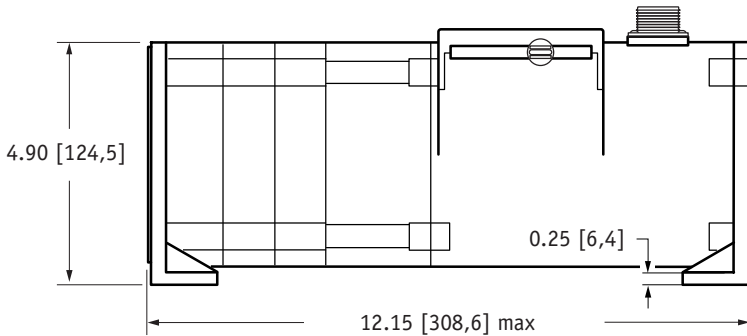

DIMENSIONS ARE IN INCHES [MM]  
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 -.001 [+.13 -.03]  
\*\* tolerance = +.005 -.005 [+.13 -.13]

## VLS Option - Free Release Protection

The patented Celesco Velocity Limiting System (VLS) is an option for PT9000 Series cable extension transducers that limits cable retraction to a safe 40 to 55 inches per second for the single spring option and 40 to 80 inches per second for the higher tension dual spring option.

The VLS option prevents the measuring cable from ever reaching a damaging velocity during an accidental free release. This option is ideal for mobile applications that require frequent cable disconnection and reconnection. It prevents expensive unscheduled downtime due to accidental cable mishandling or attachment failure.

How To Configure Model Number for VLS Option:

**VLS 9510** -      -      -      -      -      -      -      -     

R            A            B            C            D            E            F            G

creating VLS model number (example)...

1. select PT9510 model **PT9510-1200-111-1110**
2. remove "PT" from the model number ~~PT~~ **9510-1200-111-1110**
3. add "VLS" **VLS + 9510-1200-111-1110**
4. completed model number ! **VLS9510-1200-111-1110**

Ordering Information:

**Model Number:**

**PT9510-** \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - **1** - \_\_\_\_\_ - \_\_\_\_\_ - **0**

*order code:*      **R**      **A**      **B**      **C**      **D**      **E**      **F**      **G**

Sample Model Number:

**PT9510 - 1200 - 111 - 1110**

- R** range: 500 inches
- A** enclosure/cable tension: aluminum
- B** measuring cable: nylon-coated stainless
- C** cable exit: front
- D** output signal: 0...10 vdc
- E** electrical connection: 6-pin plastic connector

**Full Stroke Range:**

<b>R</b> <i>order code:</i>	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
full stroke range, min:	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
cable tension (±35%):	27 oz.	24 oz.	20 oz.	19 oz.	18 oz.	17 oz.

**Enclosure Material:**

<b>A</b> <i>order code:</i>	<b>1</b>	<b>3</b>
enclosure material:	powder-painted aluminum	303 stainless steel
max. acceleration:	1g	.33g
max. velocity:	60 inches/sec.	20 inches/sec.





**Measuring Cable:**

<b>B</b> <i>order code:</i>	<b>1</b>	<b>2</b>
	nylon-coated stainless steel*	un-coated stainless steel*









\*cable diameter: {

stroke range:	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
nylon-coated cable:	.034 in.	.019 in.	.019 in.	.019 in.	.014 in.	.014 in.
un-coated cable:	.031 in.	.018 in.	.018 in.	.018 in.	.015 in.	.015 in.

**Cable Exit:**


<b>G</b> <i>order code:</i>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
	front	top	back	down
				

**Output Signals:**

<b>F</b> <i>order code:</i>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
output signal options:	0...10 VDC 	10...0 VDC 	0...5 VDC 	5...0 VDC 	-10...+10 VDC 	+10...-10 VDC 	-5...+5 VDC 	+5...-5 VDC 
input voltage:	14.5 - 40 vdc		10.5 - 40 vdc		14.5 - 40 vdc		10.5 - 40 vdc	
span adjustment:	to 50% of full stroke range				to 75% of full stroke range			
zero adjustment:	from factory set zero to 50% of full stroke range				from factory set zero to 25% of full stroke range			









example:

ordercode = **1** = 0...10 VDC →











Ordering Information (cont.):


**Electrical Connection:**

order code:	1	2	3	4																								
	6-pin plastic connector w/mating plug <b>IP 67, NEMA 4X**, 6</b>	10-ft. [3 M] waterproof cable <b>IP 67, NEMA 4X**, 6</b>	6-pin metal connector w/mating plug <b>IP 65, NEMA 4</b>	25-ft. [7.5 M] instrumentation cable <b>IP 67, NEMA 6</b>																								
	 3.0 in. [78 mm] 1/2 - 5/16" [14 - 8 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	 10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW	 2.4 in. [60 mm] 3/8-in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	 25 ft. x 0.2-in. dia. [7.5 M x 5 mm dia.] 24 AWG, shielded																								
order code:	5	6	7																									
	100-ft. [30 M] waterproof cable <b>IP 67, NEMA 4X**, 6</b>	10-ft. [3 M] <b>pressure tested*</b> waterproof cable <b>IP 68, NEMA 4X**, 6P</b>	100-ft. [30 M] <b>pressure tested*</b> waterproof cable <b>IP 68, NEMA 4X**, 6P</b>																									
	 100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW	 10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW	 100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW																									
	<b>6-pin Mating Plug</b>	<b>Waterproof Cable</b>	<b>Instrumentation Cable</b>																									
	<table border="0"> <tr> <td>pin</td> <td>signal</td> </tr> <tr> <td>A</td> <td>input voltage</td> </tr> <tr> <td>B</td> <td>output signal</td> </tr> <tr> <td>C</td> <td>common</td> </tr> </table>	pin	signal	A	input voltage	B	output signal	C	common	 contact view	<table border="0"> <tr> <td>color code</td> <td>signal</td> </tr> <tr> <td>WHITE</td> <td>input voltage</td> </tr> <tr> <td>GREEN</td> <td>output signal</td> </tr> <tr> <td>BLACK</td> <td>common</td> </tr> </table>	color code	signal	WHITE	input voltage	GREEN	output signal	BLACK	common	<table border="0"> <tr> <td>color code</td> <td>signal</td> </tr> <tr> <td>RED</td> <td>input voltage</td> </tr> <tr> <td>GREEN</td> <td>output signal</td> </tr> <tr> <td>BLACK</td> <td>common</td> </tr> </table>	color code	signal	RED	input voltage	GREEN	output signal	BLACK	common
pin	signal																											
A	input voltage																											
B	output signal																											
C	common																											
color code	signal																											
WHITE	input voltage																											
GREEN	output signal																											
BLACK	common																											
color code	signal																											
RED	input voltage																											
GREEN	output signal																											
BLACK	common																											


Notes: { \* -Test pressure: 100 feet [30 meters] H<sub>2</sub>O (40 PSID); Test Medium: Air; Duration: 2 hours.  
\*\* -NEMA 4X applies to stainless steel enclosure only.

Output Signal Settings (does not apply to -5...+5 & -10...+10 vdc options)

output signal	switch setting	signal board
0...10 vdc		
10...0 vdc		
0...5 vdc		
5...0 vdc		

  
dip-switch location

To gain access to the signal board, remove four Allen-Head Screws and remove end cover bracket.

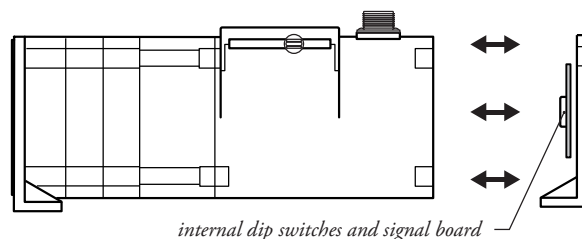

**Caution! Do Not Remove Spring-Side End Cover**  
Removing spring-side end cover could cause spring to become unseated and permanently damaged.

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.

version: 8.0 last updated: April 30, 2013

# PT9150 (Extended Range)

## Extended Ranges • Incremental Encoder

Linear Position to 1700 inches (4300 cm)  
 Stroke Range Options: 0-600 to 0-1700 inches  
 VLS Option To Prevent Free-Release Damage  
 IP67 • NEMA 6 Protection

### GENERAL



Full Stroke Range Options (on this datasheet)	0-600 to 0-1700 inches
Output Signal	incremental encoder (quadrature)
Output Driver Options	TTL/CMOS, open collector or line driver
Accuracy	0.04% full stroke
Repeatability	± 0.02% full stroke
Resolution Options	10 to 250 pulses per inch
Measuring Cable	nylon-coated stainless steel
Enclosure Material	powder-painted aluminum or stainless steel
Sensor	optical incremental encoder
Maximum Retraction Acceleration	see ordering information
Maximum Velocity	see ordering information
Weight, Aluminum (Stainless Steel) Enclosure	14 lbs. (28 lbs.) max.

### ELECTRICAL

Input Voltage	see ordering information
Input Current	see ordering information

### ENVIRONMENTAL


Enclosure	NEMA 4/4X/6, IP 67
Operating Temperature	0° to 160°F (-17° to 71°C)
Vibration	up to 10 g to 2000 Hz maximum

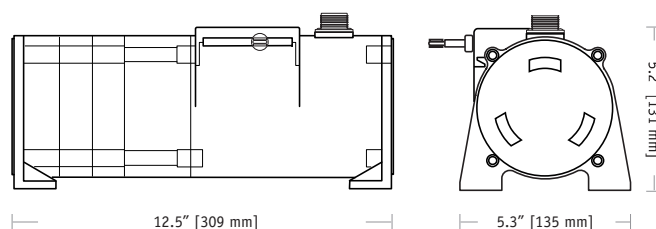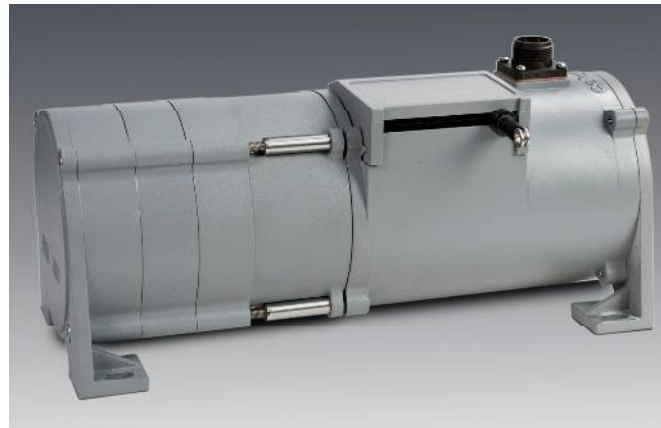

With its incremental optical encoder and industrial design this rugged transducer provides the highest accuracy and longest life of any measurement device of its kind. This model is available in a wide variety of resolutions and output stages to fit virtually any requirement.



It can measure up to 1700", yet when its cable is retracted it is only 6" long. Its small size and low-cost-to-measurement ratio offers remarkable flexibility and value.

### Output Signal Options:

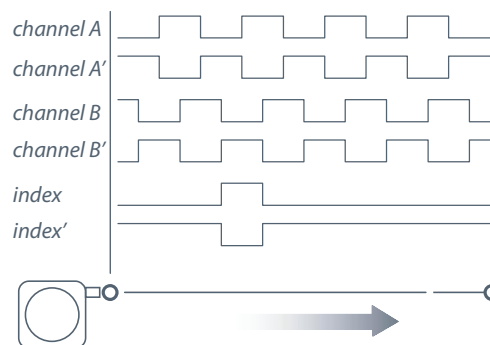



-- see ordering information for available channels

Outline Drawing

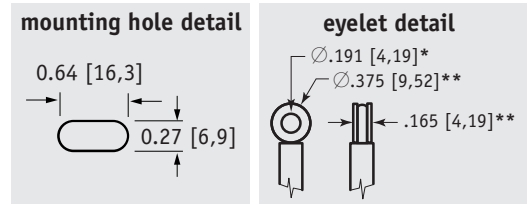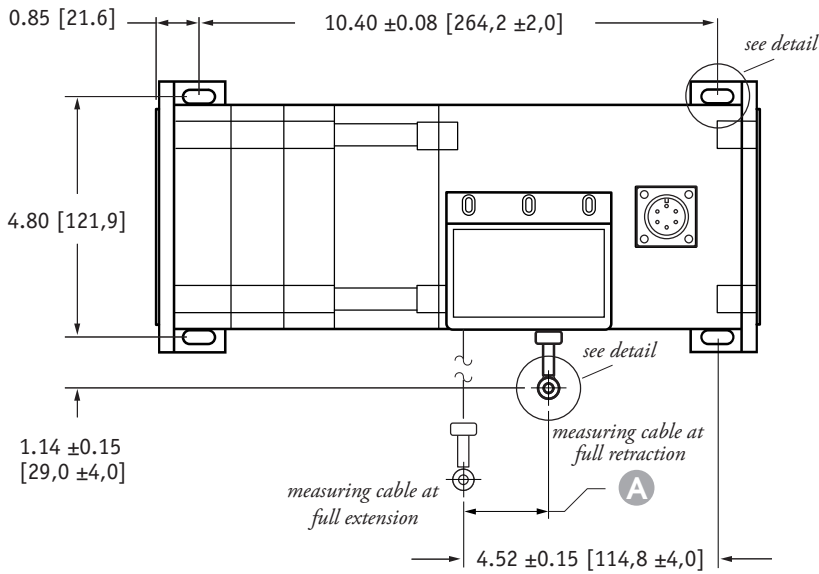

**A DIMENSION**

RANGE	inches [mm]
600	1.76 [44,7]
800	1.58 [40,1]
1000	1.98 [50,2]
1200	1.98 [50,2]
1500	1.86 [47,2]
1700	2.11 [53,6]

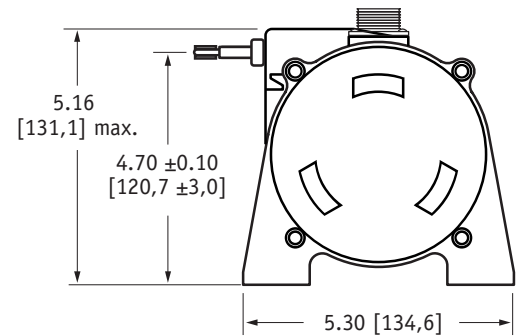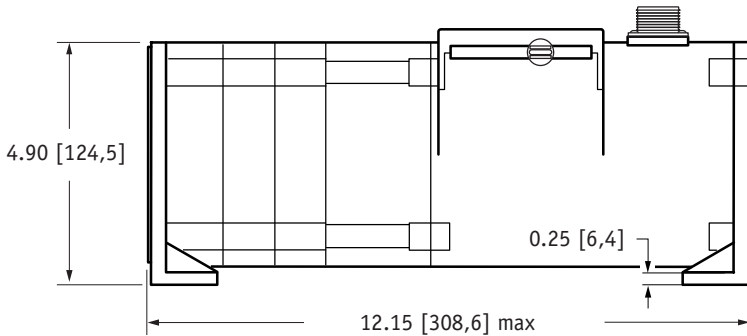

DIMENSIONS ARE IN INCHES [MM]  
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 -.001 [+.13 -.03]  
\*\* tolerance = +.005 -.005 [+.13 -.13]

## VLS Option - Free Release Protection

The patented Celesco Velocity Limiting System (VLS) is an option for PT9000 Series cable extension transducers that limits cable retraction to a safe 40 to 55 inches per second for the single spring option and 40 to 80 inches per second for the higher tension dual spring option.

The VLS option prevents the measuring cable from ever reaching a damaging velocity during an accidental free release. This option is ideal for mobile applications that require frequent cable disconnection and reconnection. It prevents expensive unscheduled downtime due to accidental cable mishandling or attachment failure.

How To Configure Model Number for VLS Option:

**VLS 9150** -      -      -      -      -      -      -      -     

creating VLS model number (example)...

- |                                      |   |
|--------------------------------------|---|
| 1. select PT9150 model               | <b>PT9150-1200-111-1110</b>             |
| 2. remove "PT" from the model number | <del>PT</del> <b>9150-1200-111-1110</b> |
| 3. add "VLS"                         | <b>VLS + 9150-1200-111-1110</b>         |
| 4. completed model number !          | <b>VLS9150-1200-111-1110</b>            |

Ordering Information:

Model Number:

**PT9150-** \_\_\_\_\_ **0**  
*order code:*      **R**      **A**      **B**      **C**      **D**      **E**      **F**      **G**

Sample Model Number:

**PT9150 - 0800 - 111 - 1110**

- R** range: 500 inches
- A** enclosure: aluminum
- B** measuring cable: nylon-coated stainless
- C** cable exit: front
- D** output signal: TTL/CMOS driver
- E** resolution: 100 ±2 pulses per inch

Full Stroke Range:

<i>english ranges</i>	<b>R</b> <i>order code:</i>	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
full stroke range, min:		600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
cable tension (±35%):		27 oz.	24 oz.	20 oz.	19 oz.	18 oz.	17 oz.

<i>metric ranges</i>	<b>R</b> <i>order code:</i>	<b>15000</b>	<b>20000</b>	<b>25000</b>	<b>30000</b>	<b>35000</b>	<b>40000</b>
full stroke range, min:		15.000 mm	20.000 mm	25.000 mm	30.000 mm	35.000 mm	40.000 mm
cable tension (±35%):		7,5 N	6,7 N	5,6 N	5,3 N	5,0 N	4,7 N

Enclosure Material:





<b>A</b> <i>order code:</i>	<b>1</b>	<b>3</b>
enclosure material:	powder-painted aluminum	303 stainless steel
max. acceleration:	1g	.33g
max. velocity:	60 inches/sec.	20 inches/sec.

Measuring Cable:





<b>B</b> <i>order code:</i>	<b>1</b>	<b>2</b>
	nylon-coated stainless steel*	un-coated stainless steel*

<i>*cable diameter:</i>	stroke range:	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
	nylon-coated cable:	.034 in.	.019 in.	.019 in.	.019 in.	.014 in.	.014 in.
	un-coated cable:	.031 in.	.018 in.	.018 in.	.018 in.	.015 in.	.015 in.

Cable Exit:

<b>G</b> <i>order code:</i>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
	front	top	back	down
				

Output Signals:





<b>D</b> <i>order code:</i>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
output driver:	TTL - CMOS	Open Collector	5 V - Line Driver	Universal Line Driver
	Input voltage (V+): 4.5...13.2 Vdc Sink current: 20 mA max. Input current: 80 mA max.	Input voltage (V+): 10.8...26.4 Vdc Sink current: 20 mA max. Input current: 80 mA max.	Input voltage (V+): 5 Vdc Sink current: 20 mA max. Input current: 150 mA max.	Input voltage (V+): 5...30 VDC Source/Sink: 20 mA max. Input current: 100 mA max, no load
				

Ordering Information (cont.):

**Resolution:**


order code:	1	2	3	4
english ranges:	100 ±2 pulses per in.	200 ±4 pulses per in.	250 ±5 pulses per in.	10 ±0.2 pulses per in.
metric ranges:	5 ±0,1 pulses per mm	10 ±0,2 pulses per mm	12,5 ±0,25 pulses per mm	0,5 ±0,01 pulses per mm

**Electrical Connection:**

order code:	1	2	3	4
	6-pin plastic connector with mating plug <b>IP 67, NEMA 4X*,6</b>	25-ft. instrumentation cable 24 AWG, shielded <b>IP 67, NEMA 6</b>	18-pin plastic connector with mating plug <b>IP 65, NEMA 4</b>	6-pin metal connector with mating plug <b>IP 67, NEMA 6</b>
				
	.30 - .39 in. [8 - 10 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	25 ft. x 0.2-in. dia. [7,5 M x 5 mm dia.] 24 AWG, shielded	.26 - .30 in. [6,6 - 7,6 mm] cable dia. 20 - 24 AWG conductor size connector: Conxall 14282-18PG-300-K mating plug: Conxall 13282-18SG-326-K	3/8-in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S


**6-pin mating plug:**

pin	TTL/CMOS	5 V Line Driver
A	Open Collector	Universal Line Driver
B	input voltage	input voltage
C	common	common
D	channel A	channel A
E	channel B	channel B
F	-	channel A'
	-	channel B'



**18-pin mating plug:**

pin	TTL/CMOS	5 V Line Driver
1	Open Collector	Universal Line Driver
2	input voltage	input voltage
3	common	common
4	channel B	channel B
5	channel A	channel A
6	-	index
7	-	channel B'
8	-	channel A'
9	-	index'
10	-	-
11	-	-
12	-	-
13	-	-
14	-	-
15	-	-



**25-ft. instrumentation cable:**

color	TTL/CMOS	5 V Line Driver
red	Open Collector	input voltage
black	input voltage	common
green	common	channel A
white	channel A	channel A
blue	channel B	channel B
brown	-	channel A'
yellow	-	channel B'
orange	-	index
	-	index'

\*-applies to stainless steel enclosure only.

version: 6.0 last updated: April 10, 2013



# Cable-Extension Position Transducer

**RS232 Data Communication**  
**Ranges: 0-600 to 0-1700 inches**  
**Industrial Grade**

<Extended Range>

# PT9232

## Specification Summary:

### GENERAL

Full Stroke Ranges..... 0-600 to 0-1700 inches  
 Electrical Interface ..... RS232  
 Format ..... HEX  
 Accuracy .....  $\pm 0.10\%$  full stroke  
 Repeatability.....  $\pm 0.02\%$  full stroke  
 Resolution .....  $\pm 0.003\%$  full stroke  
 Measuring Cable ..... nylon-coated stainless steel  
 Enclosure Material..... powder-painted aluminum or stainless steel  
 Sensor ..... plastic-hybrid precision potentiometer  
 Potentiometer Cycle Life..... 250,000 cycles *before signal degradation may occur*  
 Maximum Retraction Acceleration..... *see ordering information*  
 Maximum Velocity ..... *see ordering information*  
 Weight, Aluminum (Stainless Steel) Enclosure ..... .8 lbs. (16 lbs.), max.

### ELECTRICAL

Input Voltage ..... 9...22 VDC  
 Input Current..... 40 mA  
 Baud Rate ..... 9600 (selectable to 38.4K)  
 Update Rate..... 32msec


### ENVIRONMENTAL

Environmental Suitability..... NEMA 4X/6, IP 67  
 Operating Temperature ..... -40° to 200°F (-40° to 90°C)  
 Vibration..... up to 10 G's to 2000 Hz maximum




The PT9232 delivers position feedback via RS232 serial communication to your data acquisition or controller system. The PT9232 sends a raw 16-bit count from 0000H to FFFFH. Additionally this device can be set to continuously send data or send data only when polled.

As the internal position sensing element is a precision potentiometer, this transducer maintains current accurate position even during power loss and does not need to be reset to a "home" position.

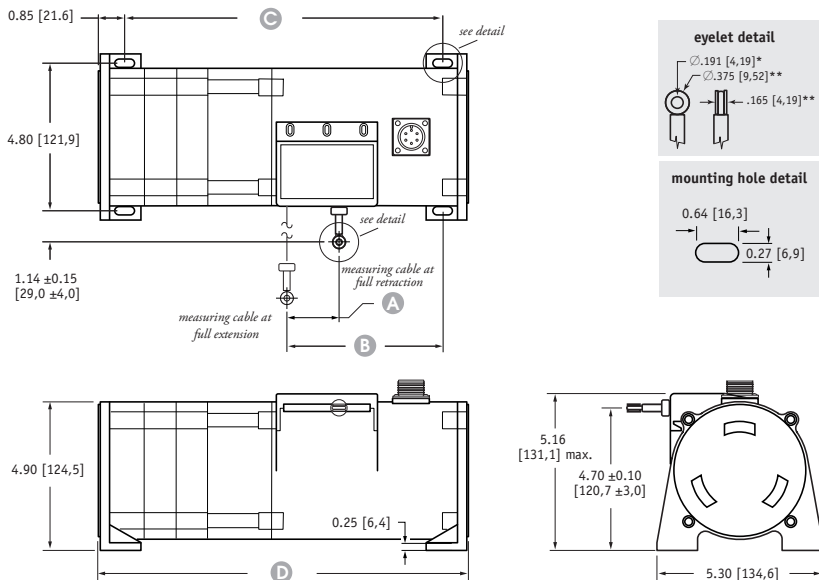

## Output Signal

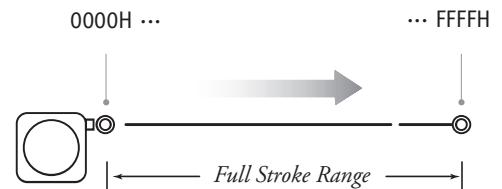

	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
A	1.76 [44,7]	1.58 [40,1]	1.98 [50,2]	1.49 [37,8]	1.86 [47,2]	2.11 [53,6]
B	4.52 $\pm 0.15$ [114,8 $\pm 4,0$ ]					
C	10.40 $\pm 0.08$ [264,2 $\pm 2,0$ ]					
D	12.15 [308,6] max.					


DIMENSIONS ARE IN INCHES [MM]  
 tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance =  $+0.005 -0.001$  [+13 -03]  
 \*\* tolerance =  $+0.005 -0.005$  [+13 -13]

Celesco Transducer Products, Inc.  
 20630 Plummer Street • Chatsworth, CA 91311  
 tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799


**celesco**  
 celesco.com • info@celesco.com

**I/O Format:**



**Data Frame**

6 byte Hex string:



\*-see below

**Important!** All communications to/from the transducer are in **HEX!**

**User Commands:**

Description	User Command				Sensor Response			
	<CMD>	<B <sub>0</sub> >	<B <sub>1</sub> >	<B <sub>2</sub> >	<CMD>	<B <sub>0</sub> >	<B <sub>1</sub> >	<B <sub>2</sub> >
Get Sensor Info	0x05	0x00	0x00	0x00	0x05	version <sup>(4)</sup>	date <sup>(5)</sup>	date <sup>(5)</sup>
Get Serial Number	0x15	0x00	0x00	0x00	0x15	serial number <sup>(3)</sup>		
Start Continuous Data	0x25	0x00	0x00	0x00	0x25	0x00	0x00	0x00
Stop Continuous Data	0x35	0x00	0x00	0x00	0x35	0x00	0x00	0x00
Get Position Data	0x45	0x00	0x00	0x00	0x45	CMC <sup>(1)</sup>	CMC <sup>(1)</sup>	status <sup>(2)</sup>

**(1)CMC - Current Measurement Count (Position)**

The **Current Measurement Count (CMC)** is the output data that indicates the present position of the measuring cable.

The CMC is a 16-bit value that occupies the first two bytes (B<sub>0</sub> and B<sub>1</sub>) of the data field. B<sub>0</sub> is the MSB (most significant byte) and B<sub>1</sub> is the LSB (least significant byte).

The CMC starts at 0000H with the measuring cable fully retracted and continues upward to the end of the stroke range stopping at FFFFH. This holds true for all ranges.

**(2)Status**

The status byte is used as a flag to indicate the validity of the position signal that the internal electronics receives from the potentiometer.

Flags are as follows:  
0x00 = GREEN, 0x55 = YELLOW, 0xAA = RED

A "green" flag shows everything OK. A "yellow" or "red" flag indicates that the sensor has either been extended beyond its range or that there is a problem with the potentiometer.

**(3)Serial Number**

Each sensor has its own unique serial number. This information can be retrieved by sending the sensor the "Get Serial Number" command.

The serial number is a 3 byte value from which ranges from 0 to 9999999 (decimal).

**(4)Version**

This is a single byte value (0-255 decimal) which indicates the currently installed firmware version of the sensor.

**(5)Date**

This is a 2 byte value showing the date of currently installed firmware. This value ranges from 01011 - 12319 (decimal). Format is MMDDY. While the month and day are expressed as two digit numbers the year is expressed in a single digit only.

Example: 08054 = August 5, 2004

**Baud Rate**



The baud rate can be set using switches 7 & 8 on the 8-pole DIP switch found on the rs232 controller board located inside the transducer.

DIP-7	DIP-8	baud rate
0	0	9600
1	0	19200
0	1	38400
1	1	9600



**RS232 Controller Board and DIP Switch Location**

*baud rate switches*



internal dip switches & controller board  
to gain access to the controller board, remove four Allen-Head Screws and remove end cover bracket.

**Ordering Information:**

**Model Number:**

**PT9232** - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_  
*order code:*                      **R**                      **A**                      **B**                      **C**

Sample Model Number:

**PT9232 - 1200 - AL - FR - M6**

- R** range: 1200 inches
- A** enclosure: aluminum
- B** cable exit: front (horizontal)
- C** electrical connection: 6-pin plastic connector





**Full Stroke Range:**

<b>R</b> <i>order code:</i>	<b>600</b>	<b>800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
full stroke range, min:	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
cable tension (±35%):	27 oz.	24 oz.	20 oz.	19 oz.	18 oz.	17 oz.
measuring cable:	.034-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.014-in. dia. nylon-coated stainless	.014-in. dia. nylon-coated stainless




**Enclosure Material:**

<b>A</b> <i>order code:</i>	<b>AL</b>	<b>SS</b>
enclosure material:	powder-painted aluminum	303 stainless steel
max. acceleration:	1g	.33g
max. velocity:	60 inches/sec.	20 inches/sec.

**Cable Exit:**

<b>B</b> <i>order code:</i>	<b>FR</b> front	<b>UP</b> top	<b>BK</b> back	<b>DN</b> down
				

**Electrical Connection:**

<b>C</b> <i>order code:</i>	<b>M6</b>	<b>C25</b>																												
	6-pin plastic connector with mating plug IP 67, NEMA 6, NEMA 4X (stainless enclosure only)	25-ft. instrumentation cable 24 AWG, shielded IP 67, NEMA 6																												
	 .30 - .39 in. [8 - 10 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	 25 ft. x 0.2-in. dia. [7,5 M x 5 mm dia.] 24 AWG, shielded																												
	 <i>contact view</i>																													
	<table border="0"> <tr> <td><b>pin</b></td> <td><b>signal</b></td> </tr> <tr> <td>A</td> <td>9...22 VDC</td> </tr> <tr> <td>B</td> <td>common</td> </tr> <tr> <td>C</td> <td>-</td> </tr> <tr> <td>D</td> <td>Transmitted Data</td> </tr> <tr> <td>E</td> <td>Received Data</td> </tr> <tr> <td>F</td> <td>common</td> </tr> </table>	<b>pin</b>	<b>signal</b>	A	9...22 VDC	B	common	C	-	D	Transmitted Data	E	Received Data	F	common	<table border="0"> <tr> <td><b>color code</b></td> <td><b>signal</b></td> </tr> <tr> <td>Red</td> <td>9...22 VDC</td> </tr> <tr> <td>Black</td> <td>common</td> </tr> <tr> <td>White</td> <td>-</td> </tr> <tr> <td>Green</td> <td>Transmitted Data</td> </tr> <tr> <td>Blue</td> <td>Received Data</td> </tr> <tr> <td>Brown</td> <td>common</td> </tr> </table>	<b>color code</b>	<b>signal</b>	Red	9...22 VDC	Black	common	White	-	Green	Transmitted Data	Blue	Received Data	Brown	common
<b>pin</b>	<b>signal</b>																													
A	9...22 VDC																													
B	common																													
C	-																													
D	Transmitted Data																													
E	Received Data																													
F	common																													
<b>color code</b>	<b>signal</b>																													
Red	9...22 VDC																													
Black	common																													
White	-																													
Green	Transmitted Data																													
Blue	Received Data																													
Brown	common																													

version: 6.0 last updated: December 7, 2011

# PT9301 (Extended Range)

## Extended Ranges • Position/Velocity Output

Linear Position/Velocity to 1700 inches (4300 cm)

Stroke Range Options: 0-600 to 0-1700 inches

VLS Option To Prevent Free-Release Damage

IP68 • NEMA 6 Protection

### GENERAL

Full Stroke Range Options (on this datasheet)	0-600 to 0-1700 inches
Measuring Cable Options	stainless steel or thermoplastic
Enclosure Material	powder-painted aluminum
Sensor, Position	plastic-hybrid precision potentiometer
Sensor, Velocity	DC tach generator
Maximum Retraction Acceleration	see ordering information
Maximum Velocity	see ordering information
Weight, Aluminum (Stainless Steel) Enclosure	14 lbs. (28 lbs.) max.

### POSITION

Output Signal	voltage divider (potentiometer)
Accuracy	$\pm 0.10\%$ full stroke
Repeatability	$\pm 0.02\%$ full stroke
Resolution	essentially infinite
Sensor, Position	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	$\geq 250,000$
Input Resistance Options	500, 1K, 5K or 10K $\Omega$ (see ordering information)
Power Rating, Watts	2.0 at 70°F derated to 0 at 250°F
Recommended Maximum Input Voltage	30V (AC/DC)
Output Signal Change Over Full Stroke Range	94% $\pm 4\%$ of input voltage


### VELOCITY

Output Signal	DC tachometer output
Linearity	better than $\pm 0.10\%$ of output at any velocity
Repeatability	$\pm 0.10\%$ of reading
Sensor	tach generator
Input Voltage	none required
Output Voltage @ 100 inches per minute	361 mV $\pm 3\%$
Output Impedance	350 ohms $\pm 10\%$
Output Ripple (for velocity $\geq 1.29$ inches per second)	$\pm 3\%$ rms

### ENVIRONMENTAL

Enclosure	NEMA 4/4X/6, IP 67/68
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum


20630 Plummer Street • Chatsworth, CA 91311 • Meas-Spec.com  
tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799

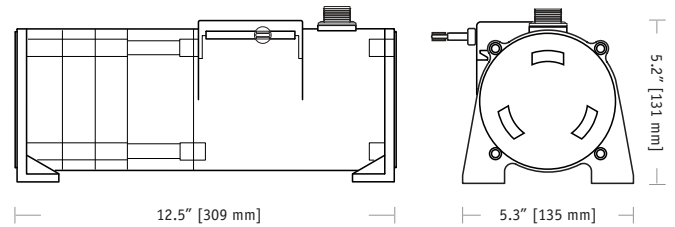

The PT9301 is a combination position and velocity transducer for demanding long-range applications requiring a linear position measurements in ranges up to 1700". A precision plastic-hybrid potentiometer provides accurate position feedback while a self-generating DC tachometer provides a velocity signal that is proportional to the speed of the traveling stainless-steel measuring cable.

As a member of Celesco's innovative family of NEMA-4 rated cable-extension transducers, the PT9301 offers numerous benefits. It installs in minutes, functions properly without perfectly parallel alignment, and when its cable is retracted, it measures only 6".


### Output Signal:

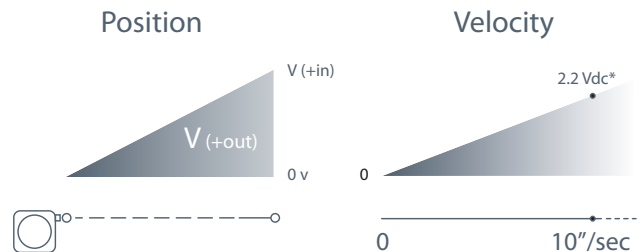


\*velocity output rate = 361 mV  $\pm 3\%$  @ 100 inches per min.

formally Celesco Transducer Products, Inc.  
celesco.com • info@celesco.com


## Outline Drawing

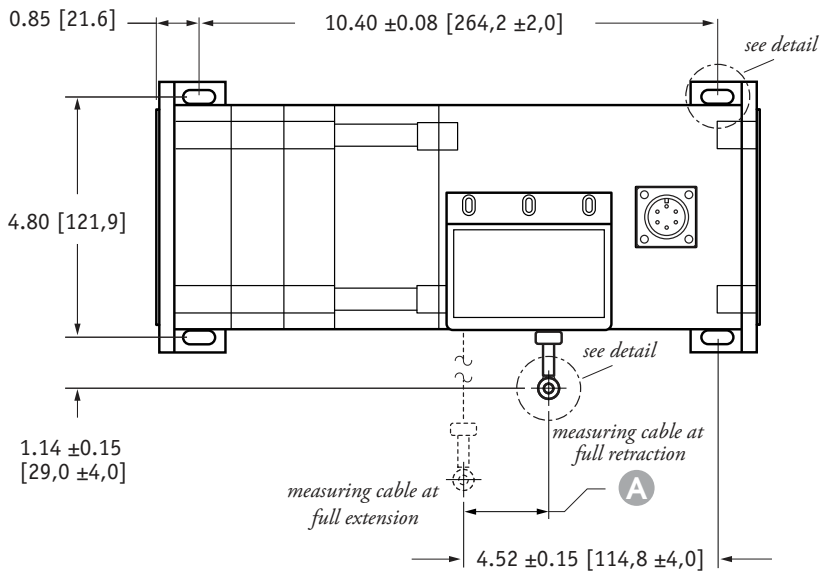

### mounting hole detail





### eyelet detail



### A DIMENSION

RANGE	inches [mm]
600	1.76 [44,7]
800	1.58 [40,1]
1000	1.98 [50,2]
1200	1.98 [50,2]
1500	1.86 [47,2]
1700	2.11 [53,6]

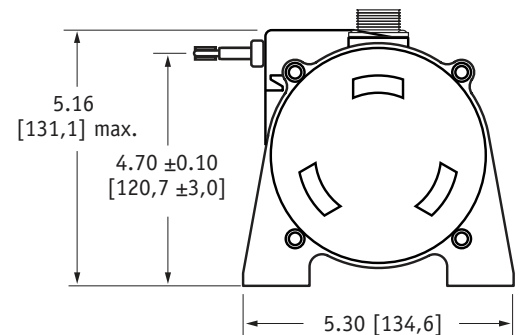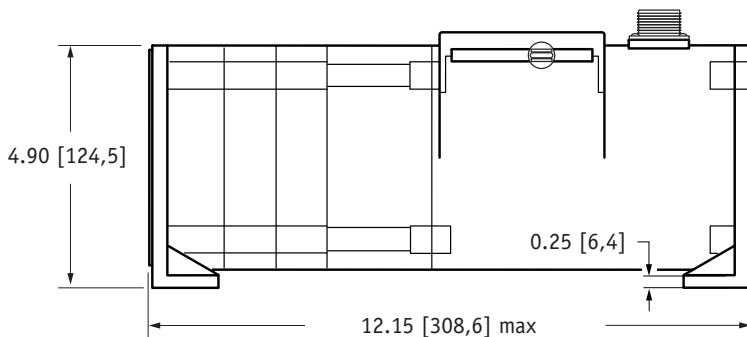

DIMENSIONS ARE IN INCHES [MM]  
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 -.001 [+ .13 -.03]  
\*\* tolerance = +.005 -.005 [+ .13 -.13]

## VLS Option - Free Release Protection

The patented Celesco Velocity Limiting System (VLS) is an option for PT9000 Series cable extension transducers that limits cable retraction to a safe 40 to 55 inches per second for the single spring option and 40 to 80 inches per second for the higher tension dual spring option.

The VLS option prevents the measuring cable from ever reaching a damaging velocity during an accidental free release. This option is ideal for mobile applications that require frequent cable disconnection and reconnection. It prevents expensive unscheduled downtime due to accidental cable mishandling or attachment failure.

### How To Configure Model Number for VLS Option:

**VLS 9301-** \_\_\_\_\_ **R** - **A** **B** **C** - **D** **E** **F** **G**

creating VLS model number (example)...

1. select PT9301 model **PT9301-1200-111-1110**
2. remove "PT" from the model number ~~PT~~ **9301-1200-111-1110**
3. add "VLS" **VLS + 9301-1200-111-1110**
4. completed model number ! **VLS9301-1200-111-1110**

Ordering Information:

**Model Number:**

**PT9301-** \_\_\_\_\_ **- 1** \_\_\_\_\_ **- 1** \_\_\_\_\_ **- 0**

order code:      **R**      **A**      **B**      **C**      **D**      **E**      **F**      **G**

Sample Model Number:

**PT9301 - 1200 - 111 - 1110**

- R** range: 1200 inches
- B** measuring cable: nylon-coated stainless
- C** cable exit: front
- D** output signal: 500 ohm position / DC tachometer
- F** electrical connection: 6-pin plastic connector

**Full Stroke Range:**





<b>R</b> order code:	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
full stroke range, min:	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
cable tension (±35%):	27 oz.	24 oz.	20 oz.	19 oz.	18 oz.	17 oz.

**Measuring Cable:**



<b>B</b> order code:	<b>1</b>	<b>2</b>
cable construction:	nylon-coated stainless steel rope*	bare stainless steel rope*
general use:	indoor	outdoor, debris, high temperature

*cable diameter:	stroke range:	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
	nylon-coated stainless:	.034 in.	.019 in.	.019 in.	.019 in.	.014 in.	.014 in.
	bare stainless:	.031 in.	.018 in.	.018 in.	.018 in.	.015 in.	.015 in.

**Cable Exit:**

<b>C</b> order code:	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
	front	top	back	down
				

**Output Signals:**

<b>D</b> order code:	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
position sensing potentiometer:	500 ohms*	1000 ohms*	5000 ohms*	10,000 ohms*
<b>position sensing circuit</b>	 <p style="font-size: small; margin-left: 20px;">value specified by ordercode</p>			<b>velocity sensing circuit</b> 


\*-tolerance = ±10%

Ordering Information (cont.):

**Electrical Connection:**


① *order code:*

**1**  
6-pin plastic connector  
with mating plug  
**IP 67, NEMA 4X\*, 6**




1/2 - 5/16" [14 - 8 mm] cable dia.  
16 AWG max conductor size  
connector: MS3102E-14S-6P  
mating plug: MS3106E-14S-6S

**3**  
6-pin metal connector  
with mating plug  
**IP 65, NEMA 4**



3/8-in. [9 mm] max cable dia.  
16 AWG max conductor size  
connector: MS3102E-14S-6P  
mating plug: MS3106E-14S-6S


**4**  
25-ft. instrumentation cable  
24 AWG, shielded  
**IP 67, NEMA 6**



25 ft. x 0.2-in. dia.  
[7,5 M x 5 mm dia.]  
24 AWG, shielded

**6-pin mating plug:**

pin	signal	} position
A	+ in	
B	common	
C	+ out	
D	-	
E	+ out	} velocity
F	- out	



**25-ft. instrumentation cable:**

color	signal	} position
red	+ in	
black	common	
green	+ out	
white	+ out	} velocity
brown	- out	

\*—applies to stainless steel enclosure only

version: **8.0** last updated: **December 17, 2015**

# Cable-Extension Position Transducer

CANbus • SAE J1939

Ranges: 0-600 to 0-1700 inches

Industrial Grade

<Extended Range>

# PT9CN

## Specification Summary:

### GENERAL

Full Stroke Range Options—on this datasheet ..... 0-600 to 0-1700 inches  
 Electrical Signal Interface ..... CANbus SAE J1939  
 Protocol ..... Proprietary B  
 Accuracy .....  $\pm 0.10\%$  full stroke  
 Repeatability .....  $\pm 0.02\%$  full stroke  
 Resolution .....  $\pm 0.003\%$  full stroke  
 Measuring Cable ..... nylon-coated stainless steel  
 Enclosure Material ..... powder-painted aluminum or stainless steel  
 Sensor ..... plastic-hybrid precision potentiometer  
 Potentiometer Cycle Life ..... 250,000, min. —before signal degradation can occur  
 Maximum Retraction Acceleration ..... see ordering information  
 Maximum Velocity ..... see ordering information  
 Weight, Aluminum (Stainless Steel) Enclosure ..... 14 lbs. (28 lbs.) max.

### ELECTRICAL

Input Voltage ..... 7 - 18 VDC  
 Input Current ..... 60 mA max.  
 Address Setting/Node ID ..... 0...63 set via DIP switches  
 Baud Rate ..... 125K, 250K or 500K set via DIP switches  
 Update Rate ..... 10 ms. (20 ms. available—contact factory)


### ENVIRONMENTAL

Enclosure ..... NEMA 4/4X/6, IP 67  
 Operating Temperature .....  $-40^{\circ}$  to  $200^{\circ}$ F ( $-40^{\circ}$  to  $90^{\circ}$ C)  
 Vibration ..... up to 10 G's to 2000 Hz maximum



The PT9CN communicates linear position feedback via the CANbus SAE J1939 interface. The PT9CN has been designed for factory and harsh environment applications requiring full stroke ranges up to 1700".

As a member of Celesco's innovative family of NEMA 4 rated cable-extension transducers, the PT9CN installs in minutes by simply mounting its body to a fixed surface and attaching its cable to the movable object. Perfect parallel alignment not required.

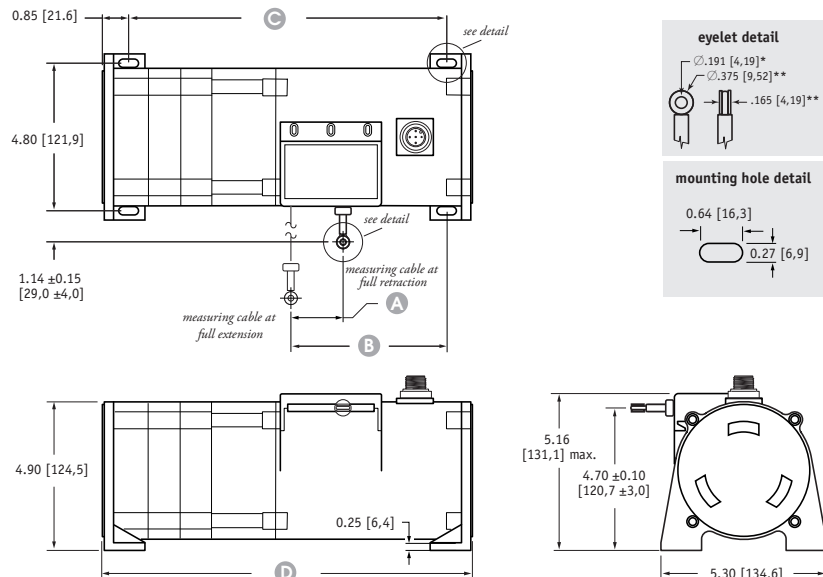


	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
A	1.76 [44,7]	1.58 [40,1]	1.98 [50,2]	1.49 [37,8]	1.86 [47,2]	2.11 [53,6]
B	4.52 $\pm 0.15$ [114,8 $\pm 4,0$ ]					
C	10.40 $\pm 0.08$ [264,2 $\pm 2,0$ ]					
D	12.15 [308,6] max.					

DIMENSIONS ARE IN INCHES [MM]  
 tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance =  $+0.005 -0.001$  [+0.13 -0.03]  
 \*\* tolerance =  $+0.005 -0.005$  [+0.13 -0.13]

### Output Signal

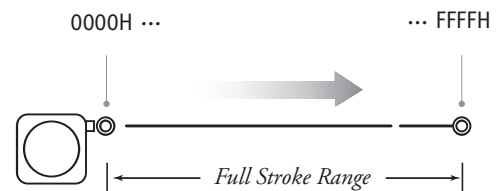


Celesco Transducer Products, Inc.  
 20630 Plummer Street • Chatsworth, CA 91311  
 tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799

**celesco**  
 celesco.com • info@celesco.com



# I/O Format and Settings

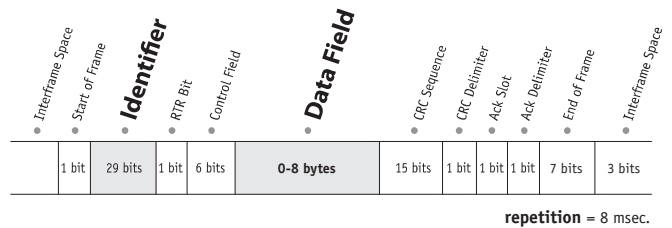

## • Identifier


	Message Priority				Future Use		J1939 Reference Proprietary B								Data Field Type*								Not Used		Node ID**							
Example	1	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	1	0	1	0	0	1	1	0	0	1	1	1	1	1	1	1
Identifier Bit No.	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Hex Value	0				F				F				5				3				3		F									

\*Sensor field data can be factory set to customer specific value. \*\*Customer defined, set via Dips 1-6. Bit values shown for example only, see **Address Setting** below.

## • Data Field

**B<sub>0</sub>** = LSB current % of measurement range byte  
**B<sub>1</sub>** = MSB current % of measurement range byte  
**B<sub>2</sub>** = LSB current measurement count byte  
**B<sub>3</sub>** = MSB current measurement count byte

**B<sub>4</sub>** = error flag  
**B<sub>5</sub>** = error flag  
**B<sub>6</sub>** = LSB velocity data byte  
**B<sub>7</sub>** = MSB velocity data byte

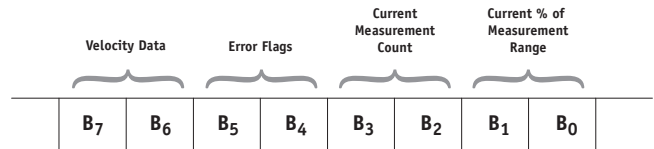

B <sub>7</sub>	B <sub>6</sub>	B <sub>5</sub>	B <sub>4</sub>	B <sub>3</sub>	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>
----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------

### Current Measurement Count

The **Current Measurement Count (CMC)** is the output data that indicates the present position of the measuring cable. The CMC is a 16-bit value that occupies bytes **B<sub>2</sub>** and **B<sub>3</sub>** of the data field. **B<sub>2</sub>** is the **LSB** (least significant byte) and **B<sub>3</sub>** is the **MSB** (most significant byte).

The **CMC** starts at **0x0000** with the measuring cable fully retracted and continues upward to the end of the stroke range stopping at **0xFFFF**. This holds true for all ranges.

### Converting CMC to Linear Measurement

To convert the current measurement count to inches or millimeters, simply divide the count by 65,535 (total counts over the range) and then multiply that value by the full stroke range:

$$\left( \frac{\text{current measurement count}}{65,535} \right) \times \text{full stroke range}$$

Sample Conversion:

If the full stroke range is **30 inches** and the current position is **0x0FF2** (4082 Decimal) then,

$$\left( \frac{4082}{65,535} \right) \times 30.00 \text{ inches} = 1.87 \text{ inches}$$

If the full stroke range is **625 mm** and the current position is **0x0FF2** (4082 Decimal) then,

$$\left( \frac{4082}{65,535} \right) \times 625 \text{ mm} = 39 \text{ mm}$$

B <sub>7</sub>	B <sub>6</sub>	B <sub>5</sub>	B <sub>4</sub>	B <sub>3</sub>	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>
----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------

### Current % of Measurement Range

The **Current % of Measurement Range** is a 2-byte value that expresses the current linear position as a percentage of the entire full stroke range. Resolution is **.1 %** of the full stroke measurement range.

This value starts at **0x0000** at the beginning of the stroke and ends at **0x03E8**.

Example:

Hex	Decimal	Percent
0000	0000	0.0%
0001	0001	0.1%
0002	0002	0.2%
...	...	...
03E8	1000	100.0%

B <sub>7</sub>	B <sub>6</sub>	B <sub>5</sub>	B <sub>4</sub>	B <sub>3</sub>	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>
----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------

### Error Flags

**0x55** (yellow LED on controller board) indicates that the sensor has begun to travel beyond the calibrated range of the internal position potentiometer.


**0xAA** (red LED on controller board) indicates that the sensor has moved well beyond the calibrated range of the internal position potentiometer.

If either error flag occurs within the full stroke range of the sensor, the unit should be returned to the factory for repair and recalibration.

B <sub>7</sub>	B <sub>6</sub>	B <sub>5</sub>	B <sub>4</sub>	B <sub>3</sub>	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>
----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------

### Velocity

Data in bytes **B<sub>7</sub>** - **B<sub>6</sub>** is the change in the **CMC** (current measurement count) over a 100 msec time period. This data can then be used to calculate velocity in a post processing operation.

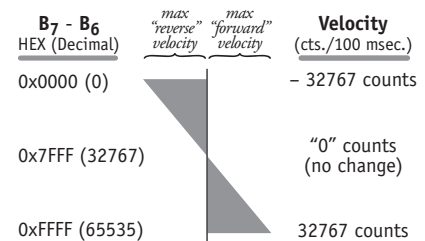

### Velocity Calculation

$$\left( \frac{\text{count change} - 32767}{.1 \text{ sec. time period}} \right) \times \left( \frac{\text{full stroke range}}{65,535} \right)$$

#### Sample Calculations

Cable Extension (positive direction):

**B<sub>7</sub>-B<sub>6</sub> = 0x80C6** (32966 Dec), **full stroke = 200 in.**

$$\left( \frac{32966 - 32767}{.1 \text{ sec}} \right) \times \left( \frac{200 \text{ in.}}{65,535} \right) = 6.07 \text{ in. / sec.}$$

Cable Retraction (negative direction):

**B<sub>7</sub>-B<sub>6</sub> = 0x7F1A** (32538 Dec), **full stroke = 200 in.**

$$\left( \frac{32538 - 32767}{.1 \text{ sec}} \right) \times \left( \frac{200 \text{ in.}}{65,535} \right) = -6.99 \text{ in. / sec.}$$

### Setting the Address (Node ID) and Baud Rate

#### Address Setting (Node ID)

The Address Setting (Node ID) is set via 6 switches located on the 8-pole DIP switch found on the DeviceNET controller board located inside the transducer.



The DIP switch settings are binary starting with switch number 1 (= 2<sup>0</sup>) and ending with switch number 6 (= 2<sup>5</sup>).

#### Baud Rate

The transmission baud rate may be either factory preset at the time of order or set manually at the time of installation.

The baud rate can be set using switches 7 & 8 on the 8-pole DIP switch found on the DeviceNET controller board located inside the transducer.

#### CANBus Controller Board

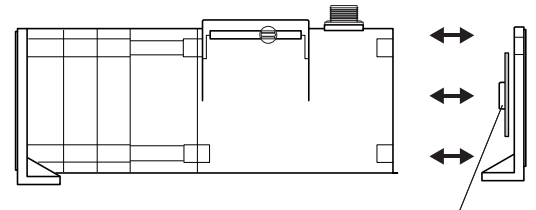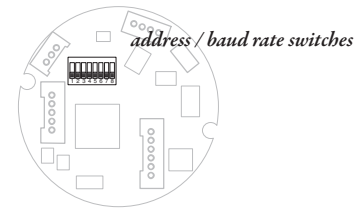

internal dip switches & controller board  
to gain access to the controller board, remove four Allen-Head Screws and remove end cover bracket.

DIP-1 (2 <sup>0</sup> )	DIP-2 (2 <sup>1</sup> )	DIP-3 (2 <sup>2</sup> )	DIP-4 (2 <sup>3</sup> )	DIP-5 (2 <sup>4</sup> )	DIP-6 (2 <sup>5</sup> )	address (decimal)
0	0	0	0	0	0	0
1	0	0	0	0	0	1
0	1	0	0	0	0	2
...	...	...	...	...	...	...
1	1	1	1	1	1	63

DIP-7	DIP-8	baud rate
0	0	125k
1	0	250k
0	1	500k
1	1	125k



### Ordering Information:

#### Model Number:

**PT9CN** -      -      -      -      - **J** -      -      -      -     

order code:      **R**      **A**      **B**      **C**      **D**      **E**      **F**

Sample Model Number:

**PT9CN - 1200 - AL - FR - J - 500 - 32 - SC5**

- R** range: 1200 inches
- A** enclosure: aluminum
- B** cable exit: front (horizontal)
- C** interface: CANbus SAE J1939
- D** baud rate: 500 k bits/sec.
- E** node ID: 32 decimal
- F** electrical connection: 5-meter cordset with straight plug

### Full Stroke Range:

<b>R</b> order code:	600	800	1000	1200	1500	1700
full stroke range, min:	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
cable tension (±35%):	27 oz.	24 oz.	20 oz.	19 oz.	18 oz.	17 oz.
measuring cable:	.034-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.014-in. dia. nylon-coated stainless	.014-in. dia. nylon-coated stainless

### Enclosure Material:

<b>A</b> order code:	AL	SS
enclosure material:	powder-painted aluminum	303 stainless steel
max. acceleration:	1g	.33g
max. velocity:	60 inches/sec.	20 inches/sec.

### Cable Exit:

<b>B</b> order code:	FR front	UP top	BK back	DN down

**Ordering Information:**






**Baud Rate:**

<b>order code:</b>	<b>125</b>	<b>250</b>	<b>500</b>
	125 kbaud	250 kbaud	500 kbaud

**Node ID:**

<b>order code:</b>	<b>0</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>...</b>	<b>61</b>	<b>62</b>	<b>63</b>
	select address (0 - 63 Decimal)							

**Electrical Connection:**
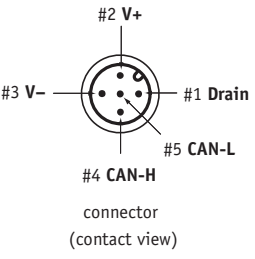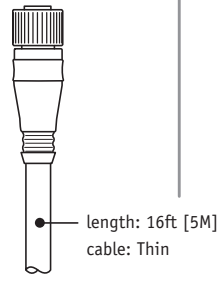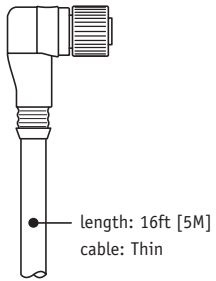
<b>order code:</b>	<b>blank</b>	<b>MC5</b>	<b>SC5</b>	<b>NC5</b>																		
	5-pin micro-connector (no mating plug supplied)	5-pin micro-connector w/ mating plug	5-pin micro-connector and 5 meter length cordset w/straight mating plug	5-pin micro-connector and 5 meter length cordset w/90° mating plug																		
	 <p>connector (contact view)</p>	 <p>0.16" - 0.32" OD Cable (THIN)</p>	 <p>length: 16ft [5M] cable: Thin</p>	 <p>length: 16ft [5M] cable: Thin</p>																		
		 <p>mating plug (contact view)</p>																				
			<table border="1"> <thead> <tr> <th>pin</th> <th>signal</th> <th>wire color</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>drain</td> <td>brown</td> </tr> <tr> <td>2</td> <td>V+</td> <td>white</td> </tr> <tr> <td>3</td> <td>V-</td> <td>blue</td> </tr> <tr> <td>4</td> <td>Can-H</td> <td>black</td> </tr> <tr> <td>5</td> <td>Can-L</td> <td>grey</td> </tr> </tbody> </table>	pin	signal	wire color	1	drain	brown	2	V+	white	3	V-	blue	4	Can-H	black	5	Can-L	grey	
pin	signal	wire color																				
1	drain	brown																				
2	V+	white																				
3	V-	blue																				
4	Can-H	black																				
5	Can-L	grey																				

# Cable-Extension Position Transducer

DeviceNET®

Ranges: 0-600 to 0-1700 inches

Industrial Grade

<Extended Range>

# PT9DN

## Specification Summary:

### GENERAL

Full Stroke Range Options—on this datasheet ..... 0-600 to 0-1700 inches  
 Electrical Signal Interface ..... CANbus ISO 11898  
 Protocol ..... DeviceNET Version 2.0  
 Accuracy .....  $\pm 0.10\%$  full stroke  
 Repeatability .....  $\pm 0.02\%$  full stroke  
 Resolution .....  $\pm 0.003\%$  full stroke  
 Measuring Cable ..... nylon-coated stainless steel  
 Enclosure Material ..... powder-painted aluminum or stainless steel  
 Sensor ..... plastic-hybrid precision potentiometer  
 Potentiometer Cycle Life ..... 250,000, min. —before signal degradation can occur  
 Maximum Retraction Acceleration ..... see ordering information  
 Maximum Velocity ..... see ordering information  
 Weight, Aluminum (Stainless Steel) Enclosure ..... 14 lbs. (28 lbs.) max.

### ELECTRICAL

Input Voltage ..... bus powered  
 Input Current ..... 40 mA  
 Address Setting/Node ID ..... 0...63 set via DIP switches —default setting: 63  
 Baud Rate ..... 125K, 250K or 500K set via DIP switches  
 EDS File ..... available @ <http://www.celesco.com/download>


### ENVIRONMENTAL

Enclosure ..... NEMA 4/4X/6, IP 67  
 Operating Temperature .....  $-40^{\circ}$  to  $200^{\circ}$ F ( $-40^{\circ}$  to  $90^{\circ}$ C)  
 Vibration ..... up to 10 G's to 2000 Hz maximum




The PT9DN communicates via DeviceNET protocol with programmable controllers in factories and harsh environments requiring linear position measurements in ranges up to 1700".

As a member of Celesco's innovative family of NEMA 4 rated cable-extension transducers, the PT9DN installs in minutes by simply mounting its body to a fixed surface and attaching its cable to the movable object. Perfect parallel alignment not required.

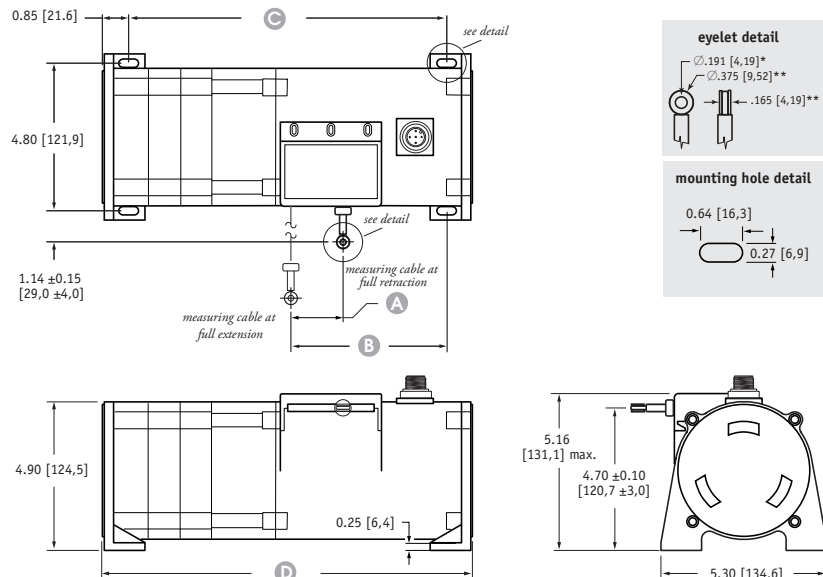

### Output Signal

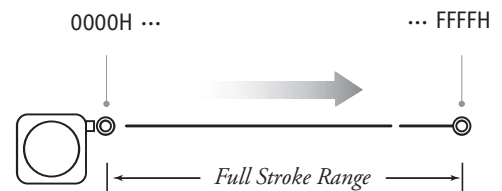

	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
A	1.76 [44,7]	1.58 [40,1]	1.98 [50,2]	1.49 [37,8]	1.86 [47,2]	2.11 [53,6]
B	4.52 $\pm 0.15$ [114,8 $\pm 4,0$ ]					
C	10.40 $\pm 0.08$ [264,2 $\pm 2,0$ ]					
D	12.15 [308,6] max.					


DIMENSIONS ARE IN INCHES [MM]  
 tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 - .001 [+ .13 - .03]  
 \*\* tolerance = +.005 - .005 [+ .13 - .13]


Celesco Transducer Products, Inc.  
 20630 Plummer Street • Chatsworth, CA 91311  
 tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799

**celesco**  
 celesco.com • info@celesco.com

**I/O Format:**

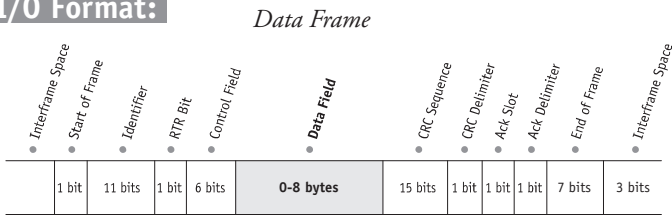

*Data Field*

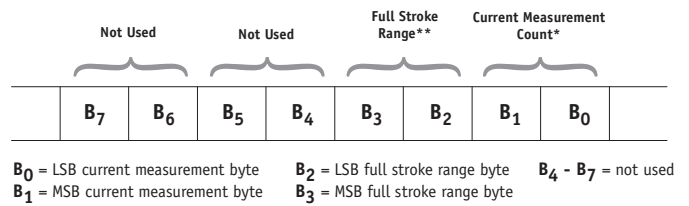

**\*Current Measurement Count**

The Current Measurement Count (CMC) is the output data that indicates the present position of the measuring cable.

The CMC is a 16-bit value that occupies the first two bytes (B<sub>0</sub> and B<sub>1</sub>) of the data field. B<sub>0</sub> is the LSB (least significant byte) and B<sub>1</sub> is the MSB (most significant byte).

The CMC starts at 0000H with the measuring cable fully retracted and continues upward to the end of the stroke range stopping at FFFFH. This holds true for all ranges.

**\*\*Full Stroke Range**

The Full Stroke Range (FSR) is a 16-bit value in the data field that expresses the full range of the sensor in inches. This value can be used to convert the actual count to units of measurement should the application require it.

The full stroke measurement range occupies the second two bytes (B<sub>2</sub> and B<sub>3</sub>) of the data field.

B<sub>2</sub> is the LSB (least significant byte) and B<sub>3</sub> is the MSB (most significant byte).

This value is expressed in inches.

Example:

Hex Value	Decimal Equivalent	Full Stroke Range
001E	30	30 inches

**Converting CMC to Inches**

If required, the CMC can easily be converted to a linear measurement expressed in inches instead of just counts.

This is accomplished by first dividing the CMC by 65,535 (total counts over the range) and then multiplying that value by the FSR:

$$\left( \frac{\text{CMC}}{65,535} \right) \times \text{FSR}$$

Example:

If the full stroke range is **30 inches** and the current position is **OFF2 Hex** (4082 Decimal) then,

$$\left( \frac{4082}{65,535} \right) \times 30.00 \text{ inches} = 1.87 \text{ inches}$$

**Address Setting (Node ID), Baud Rate and Bus Termination Settings**

**Address Setting (Node ID)**

The Address Setting (Node ID) is set via 6 switches located on the 8-pole DIP switch found on the DeviceNET controller board located inside the transducer.

The DIP switch settings are binary starting with switch number 1 (= 2<sup>0</sup>) and ending with switch number 6 (= 2<sup>5</sup>).

DIP-1 (2 <sup>0</sup> )	DIP-2 (2 <sup>1</sup> )	DIP-3 (2 <sup>2</sup> )	DIP-4 (2 <sup>3</sup> )	DIP-5 (2 <sup>4</sup> )	DIP-6 (2 <sup>5</sup> )	address (decimal)
0	0	0	0	0	0	0
1	0	0	0	0	0	1
0	1	0	0	0	0	2
...	...	...	...	...	...	...
1	1	1	1	1	1	63



**Baud Rate**

The transmission baud rate may be either factory preset at the time of order or set manually at the time of installation.

The baud rate can be set using switches 7 & 8 on the 8-pole DIP switch found on the DeviceNET controller board located inside the transducer.


DIP-7	DIP-8	baud rate
0	0	125k
1	0	250k
0	1	500k
1	1	125k





**Bus Termination**

The setting of the internal bus termination resistor may be specified upon order or manually changed by the end user at the time of installation.

The bus termination resistor is activated setting switches 1 & 2 on the 2-pole DIP switch (located on the internal DeviceNET controller board) to the "ON" position.

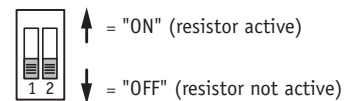

**DeviceNET Controller Board and DIP Switch Location**

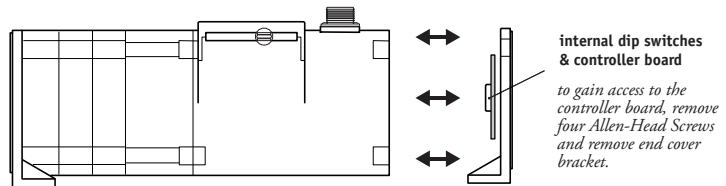

**Ordering Information:**

**Model Number:**

**PT9DN** - \_\_\_\_\_  
*order code:*            **R**    **A**    **B**    **C**    **D**    **E**

Sample Model Number:

**PT9DN - 1200 - AL - FR - 500 - TR - SC5**

- R** range: 1200 inches
- A** enclosure: aluminum
- B** cable exit: front (horizontal)
- C** baud rate: 500 k bits/sec.
- D** terminating resistor: yes
- E** electrical connection: 5-meter cordset with straight plug





**Full Stroke Range:**

<b>R</b> <i>order code:</i>	<b>600</b>	<b>800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
full stroke range, min:	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
cable tension (±35%):	27 oz.	24 oz.	20 oz.	19 oz.	18 oz.	17 oz.
measuring cable:	.034-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.014-in. dia. nylon-coated stainless	.014-in. dia. nylon-coated stainless

**Enclosure Material:**

<b>A</b> <i>order code:</i>	<b>AL</b>	<b>SS</b>
enclosure material:	powder-painted aluminum	303 stainless steel
max. acceleration:	1g	.33g
max. velocity:	60 inches/sec.	20 inches/sec.

**Cable Exit:**

<b>B</b> <i>order code:</i>	<b>FR</b> front	<b>UP</b> top	<b>BK</b> back	<b>DN</b> down
				

**Baud Rate:**

<b>C</b> <i>order code:</i>	<b>125</b>	<b>250</b>	<b>500</b>
	125 kbaud	250 kbaud	500 kbaud

**Terminating Resistor:**

<b>D</b> <i>order code:</i>	<b>TR</b>	<b>NR</b>
	terminating resistor	no terminating resistor


**Ordering Information:**

**Electrical Connection:**

Ⓜ *order code:*



**blank**

5-pin micro-connector  
(no mating plug supplied)




**MC5**

5-pin micro-connector  
w/ mating plug




**SC5**

5-pin micro-connector  
and 5 meter length cordset  
w/straight mating plug



**NC5**

5-pin micro-connector  
and 5 meter length cordset  
w/90° mating plug



pin	signal	wire color
1	drain	brown
2	V+	white
3	V-	blue
4	Can-H	black
5	Can-L	grey

# String Encoder

**Mates To Virtually Any Encoder**  
**Ranges: 0-600 to 0-1700 inches**  
**Available With or Without Encoder**

<Extended Range>

# PT9600


## Specification Summary:

### GENERAL

Full Stroke Range Options—on this datasheet ..... 0-600 to 0-1700 inches  
 Motion Conversion Ratio ..... 12.6 inches per turn, *see ordering information*  
 Accuracy  
 Typical ..... the lesser of 0.02% f.s. or 0.04% of measurement  $\pm 1/2$  pulse max.  
 Best ..... not less than 0.001 in. (0.03 mm)  
 Repeatability .....  $\pm 0.02\%$  of measurement  $\pm 1/2$  pulse max.  
 Measuring Cable ..... nylon-coated stainless steel  
 Enclosure Material ..... powder-painted aluminum  
 Encoder Shaft Coupling ..... aluminum flexible coupling  
 Maximum Allowable Rotational Sensor Torque ..... 1.0 in-lbs.  
 Maximum Retraction Acceleration ..... *see ordering information*  
 Maximum Velocity ..... *see ordering information*  
 Weight, Aluminum (Stainless Steel) Enclosure ..... 14 lbs. (28 lbs.) max.

### ENVIRONMENTAL

Operating Temperature ..... -40° to 200°F (-40° to 90°C)

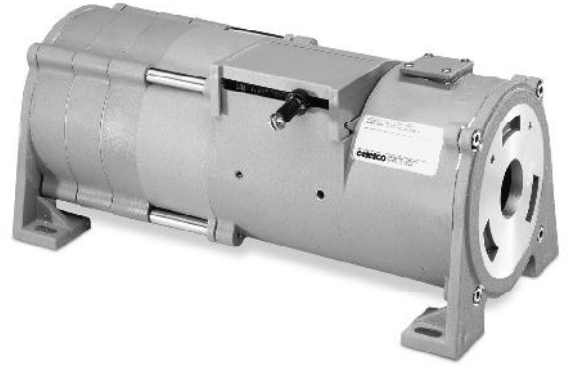

Our unique string encoder module mates to virtually any encoder, giving you a cost-effective long-range linear position measurement solution that precisely fits your requirements.

This modular approach delivers the ultimate in flexibility. To order, simply select the measurement range, the cable tension and encoder mounting style—it's that easy! We even supply all the necessary encoder mounting tools and attaching hardware. If you can't find your encoder mounting style or you want us to provide the encoder, please give us a call.



## Ordering Information:

### Model Number:

**PT9600-** \_\_\_\_\_ **-** \_\_\_\_\_ **1** \_\_\_\_\_ **-** \_\_\_\_\_  
*order code:*                      **R**                      **A**                      **B**                      **C**                      **D**

Sample Model Number:

**PT9600 - 1500 - 111 - F01**

- R** range: 1500 inches
- A** enclosure: aluminum
- C** cable exit: front
- D** rotational sensor mounting style: F01 (2.5-in. sq. flange)

» *Trying to reorder but can't find your existing model number? Please contact factory for help.*

### Full Stroke Range /Conversion Ratio:

<b>R</b> <i>order code:</i>	<b>0600</b>	<b>0800</b>	<b>1000</b>	<b>1200</b>	<b>1500</b>	<b>1700</b>
full stroke range, min:	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
cable tension ( $\pm 35\%$ ):	27 oz.	24 oz.	20 oz.	19 oz.	18 oz.	17 oz.
measuring cable:	.034-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.019-in. dia. nylon-coated stainless	.014-in. dia. nylon-coated stainless	.014-in. dia. nylon-coated stainless
aluminum enclosure, 1 turn =	12.673 $\pm$ .010 in.	12.626 $\pm$ .010 in.	12.626 $\pm$ .010 in.	12.626 $\pm$ .010 in.	12.613 $\pm$ .010 in.	12.613 $\pm$ .010 in.
stainless steel enclosure, 1 turn =	12.579 $\pm$ .010 in.	12.532 $\pm$ .010 in.	12.532 $\pm$ .010 in.	12.532 $\pm$ .010 in.	12.519 $\pm$ .010 in.	12.519 $\pm$ .010 in.

**celesco**

celesco.com • info@celesco.com

Celesco Transducer Products, Inc.  
 20630 Plummer Street • Chatsworth, CA 91311





tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799



**Enclosure Material:**

Ⓐ order code:	1	3
enclosure material:	powder-painted aluminum	303 stainless steel
max. acceleration:	1G	.33G
max. velocity:	60 inches/sec.	20 inches/sec.

**Cable Exit:**


Ⓒ order code:	1	2	3	4
	front	top	back	down
				

**Rotational Sensor Mounting Style:**


Ⓓ order code:	F01	F02	S01	S02	S04
	2.5-in. Flange Mount 3/8-inch shaft	2-in. Flange Mount 3/8-inch shaft	Face-Mount 6 mm shaft M4 mounting screws	Face-Mount 10 mm shaft M4 mounting screws	Face-Mount 10 mm shaft M3 mounting screws

*Note: If you don't see your encoder style, please contact factory. All encoder types supported.*


**F01 - 2½-inch Sq. Flange Mount (3/8-inch shaft)**

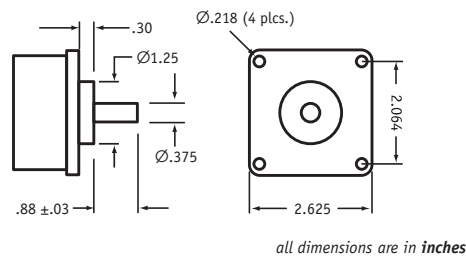


**F02 - 2-inch Sq. Flange Mount (3/8-inch shaft)**

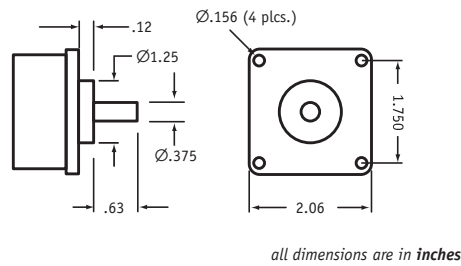


**S01 - Face-Mount (6mm shaft/M4 screws)**

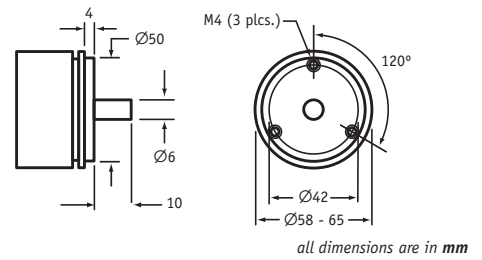

**S02 - Face-Mount (10mm shaft/M4 screws)**

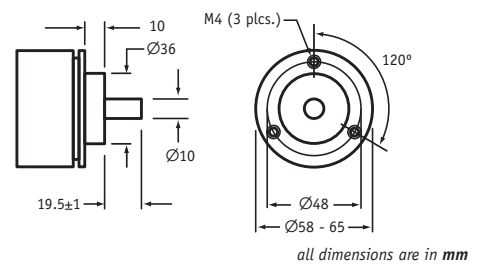


**S04 - Face-Mount (10mm shaft/M3 screws)**

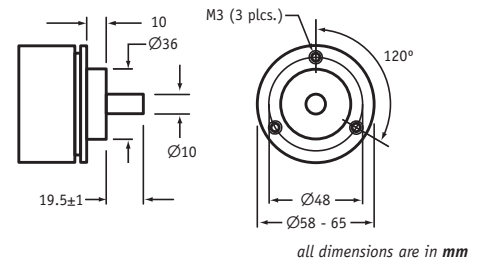

# PT9600 • Extended Range • Cable Reel Mates To Virtually Any Encoder

## Outline Drawing

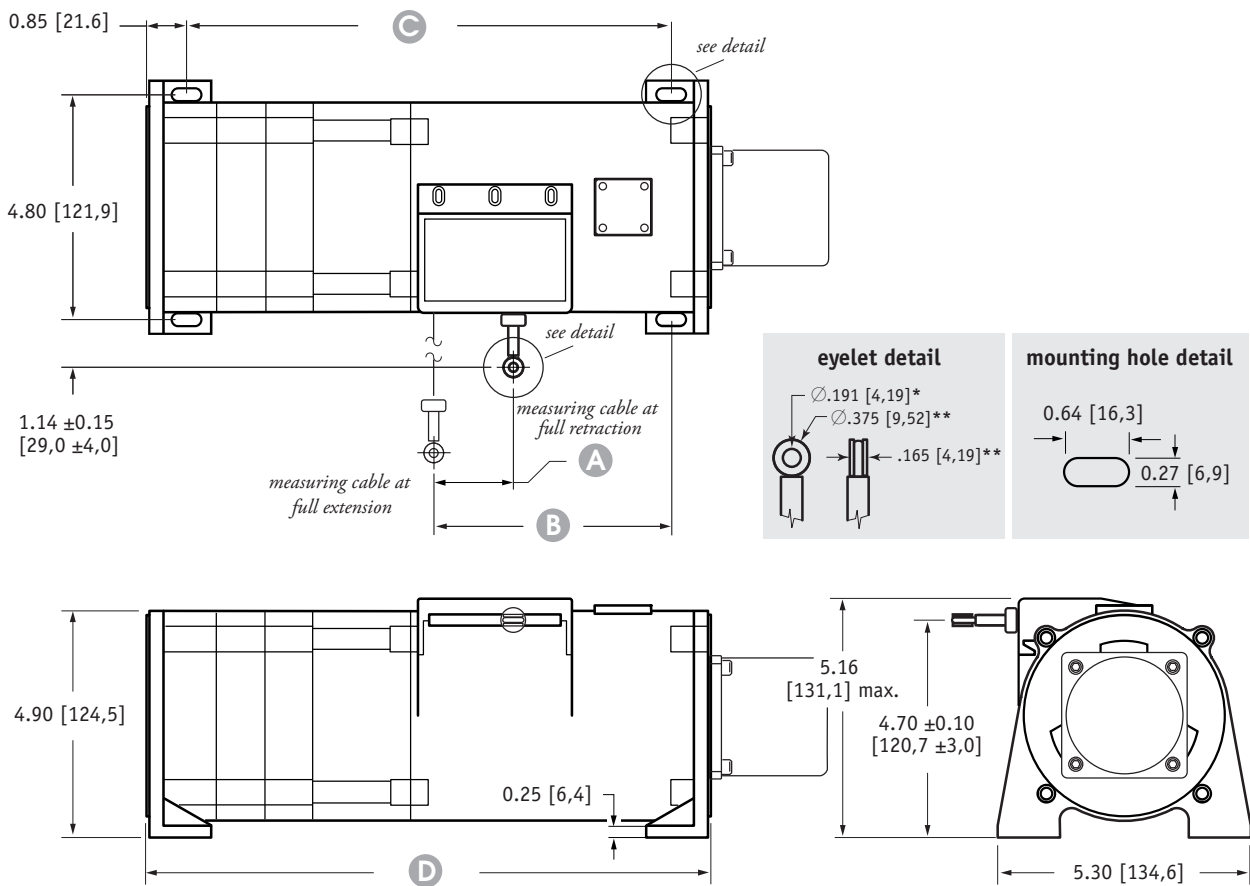

full stroke range

	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
A	1.76 [44,7]	1.58 [40,1]	1.98 [50,2]	1.49 [37,8]	1.86 [47,2]	2.11 [53,6]
B	4.52 ±0.15 [114,8 ±4,0]					
C	10.40 ±0.08 [264,2 ±2,0]					
D	12.15 [308,6] max.					

DIMENSIONS ARE IN INCHES [MM]  
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 -.001 [+ .13 -.03]  
\*\* tolerance = +.005 -.005 [+ .13 -.13]

version: 4.0 last updated: September 6, 2011